




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
0.74	0.10	1.02 +/- 0.08	200-001	0.029	0.004	0.04 +/- 0.003
1.07	0.10	1.27 +/- 0.08	200-002	0.042	0.004	0.05 +/- 0.003
1.42	0.10	1.53 +/- 0.08	200-003	0.056	0.004	0.06 +/- 0.003
1.78	0.13	1.78 +/- 0.08	200-004	0.070	0.005	0.07 +/- 0.003
2.57	0.13		200-005	0.101	0.005	
2.90	0.13		200-006	0.114	0.005	
3.69	0.13		200-007	0.145	0.005	
4.47	0.13		200-008	0.176	0.005	
5.28	0.13		200-009	0.208	0.005	
6.07	0.13		200-010	0.239	0.005	
7.66	0.13		200-011	0.302	0.005	
9.25	0.13		200-012	0.364	0.005	
10.82	0.13		200-013	0.426	0.005	
12.42	0.13		200-014	0.489	0.005	
14.00	0.18		200-015	0.551	0.007	
15.60	0.23		200-016	0.614	0.009	
17.16	0.23		200-017	0.676	0.009	
18.77	0.23		200-018	0.739	0.009	
20.35	0.23		200-019	0.801	0.009	
21.95	0.23		200-020	0.864	0.009	
23.52	0.23		200-021	0.926	0.009	
25.12	0.25		200-022	0.989	0.010	
26.70	0.25		200-023	1.051	0.010	
28.30	0.25		200-024	1.114	0.010	
29.87	0.28		200-025	1.176	0.011	
31.47	0.28		200-026	1.239	0.011	
33.05	0.28		200-027	1.301	0.011	
34.65	0.33		200-028	1.364	0.013	
37.82	0.33		200-029	1.489	0.013	
41.00	0.33		200-030	1.614	0.013	
44.17	0.38		200-031	1.739	0.015	
47.37	0.38		200-032	1.865	0.015	
50.52	0.46		200-033	1.989	0.018	
53.67	0.46	200-034	2.113	0.018		
56.87	0.46	200-035	2.239	0.018		
60.04	0.46	200-036	2.364	0.018		
63.22	0.46	200-037	2.489	0.018		
66.40	0.51	200-038	2.614	0.020		
69.57	0.51	200-039	2.739	0.020		
72.76	0.51	200-040	2.865	0.020		
75.92	0.61	200-041	2.989	0.024		
82.27	0.61	200-042	3.239	0.024		
88.62	0.61	200-043	3.489	0.024		
94.97	0.69	200-044	3.739	0.027		
101.32	0.69	200-045	3.989	0.027		
107.67	0.76	200-046	4.239	0.030		
114.02	0.76	200-047	4.489	0.030		
120.37	0.76	200-048	4.739	0.030		
126.72	0.94	200-049	4.989	0.037		
133.07	0.94	200-050	5.239	0.037		
1.24	0.10	2.62 +/- 0.08	200-102	0.049	0.004	0.103 +/- 0.003
2.06	0.13		200-103	0.081	0.005	
2.84	0.13		200-104	0.112	0.005	
3.63	0.13		200-105	0.143	0.005	
4.42	0.13		200-106	0.174	0.005	
5.23	0.13		200-107	0.206	0.005	
6.02	0.13		200-108	0.237	0.005	
7.59	0.13		200-109	0.299	0.005	
9.19	0.13		200-110	0.362	0.005	
10.77	0.13		200-111	0.424	0.005	
12.37	0.13		200-112	0.487	0.005	




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
13.94	0.18	2.62 +/- 0.08	200-113	0.549	0.007	0.103 +/- 0.003
15.54	0.23		200-114	0.612	0.009	
17.12	0.23		200-115	0.674	0.009	
18.72	0.23		200-116	0.737	0.009	
20.29	0.25		200-117	0.799	0.010	
21.89	0.25		200-118	0.862	0.010	
23.47	0.25		200-119	0.924	0.010	
25.07	0.25		200-120	0.987	0.010	
26.64	0.25		200-121	1.049	0.010	
28.24	0.25		200-122	1.112	0.010	
29.82	0.30		200-123	1.174	0.012	
31.42	0.30		200-124	1.237	0.012	
32.99	0.30		200-125	1.299	0.012	
34.59	0.30		200-126	1.362	0.012	
36.17	0.30		200-127	1.424	0.012	
37.77	0.30		200-128	1.487	0.012	
39.34	0.38		200-129	1.549	0.015	
40.94	0.38		200-130	1.612	0.015	
42.52	0.38		200-131	1.674	0.015	
44.12	0.38		200-132	1.737	0.015	
45.69	0.38		200-133	1.799	0.015	
47.29	0.43		200-134	1.862	0.017	
48.90	0.43		200-135	1.925	0.017	
50.47	0.43		200-136	1.987	0.017	
52.07	0.43		200-137	2.050	0.017	
53.64	0.43		200-138	2.112	0.017	
55.25	0.43		200-139	2.175	0.017	
56.82	0.43		200-140	2.237	0.017	
58.42	0.51		200-141	2.300	0.020	
59.99	0.51		200-142	2.362	0.020	
61.60	0.51		200-143	2.425	0.020	
63.17	0.51		200-144	2.487	0.020	
64.77	0.51		200-145	2.550	0.020	
66.34	0.51		200-146	2.612	0.020	
67.95	0.56		200-147	2.675	0.022	
69.52	0.56		200-148	2.737	0.022	
71.12	0.56		200-149	2.800	0.022	
72.69	0.56		200-150	2.862	0.022	
75.87	0.61		200-151	2.987	0.024	
82.22	0.61		200-152	3.237	0.024	
88.57	0.61		200-153	3.487	0.024	
94.92	0.71		200-154	3.737	0.028	
101.27	0.71	200-155	3.987	0.028		
107.62	0.76	200-156	4.237	0.030		
113.97	0.76	200-157	4.487	0.030		
120.32	0.76	200-158	4.737	0.030		
126.67	0.89	200-159	4.987	0.035		
133.02	0.89	200-160	5.237	0.035		
139.37	0.89	200-161	5.487	0.035		
145.72	0.89	200-162	5.737	0.035		
152.07	0.89	200-163	5.987	0.035		
158.42	1.02	200-164	6.237	0.040		
164.77	1.02	200-165	6.487	0.040		
171.12	1.02	200-166	6.737	0.040		
177.47	1.02	200-167	6.987	0.040		
183.82	1.14	200-168	7.237	0.045		
190.17	1.14	200-169	7.487	0.045		
196.52	1.14	200-170	7.737	0.045		
202.87	1.14	200-171	7.987	0.045		
209.22	1.27	200-172	8.237	0.050		
215.57	1.27	200-173	8.487	0.050		
221.92	1.27	200-174	8.737	0.050		
228.27	1.27	200-175	8.987	0.050		

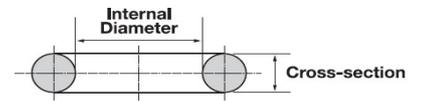


Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
234.62	1.40	2.62 +/- 0.08	200-176	9.237	0.055	0.103 +/- 0.003
240.97	1.40		200-177	9.487	0.055	
247.32	1.40		200-178	9.737	0.055	
4.34	0.13	3.53 +/- 0.10	200-201	0.171	0.005	0.139 +/- 0.004
5.94	0.13		200-202	0.234	0.005	
7.52	0.13		200-203	0.296	0.005	
9.12	0.13		200-204	0.359	0.005	
10.69	0.13		200-205	0.421	0.005	
12.29	0.13		200-206	0.484	0.005	
13.87	0.18		200-207	0.546	0.007	
15.47	0.23		200-208	0.609	0.009	
17.04	0.23		200-209	0.671	0.009	
18.64	0.25		200-210	0.734	0.010	
20.22	0.25		200-211	0.796	0.010	
21.82	0.25		200-212	0.859	0.010	
23.39	0.25		200-213	0.921	0.010	
24.99	0.25		200-214	0.984	0.010	
26.57	0.25		200-215	1.046	0.010	
28.17	0.30		200-216	1.109	0.012	
29.74	0.30		200-217	1.171	0.012	
31.34	0.30		200-218	1.234	0.012	
32.92	0.30		200-219	1.296	0.012	
34.52	0.30		200-220	1.359	0.012	
36.09	0.30		200-221	1.421	0.012	
37.69	0.38		200-222	1.484	0.015	
40.87	0.38		200-223	1.609	0.015	
44.04	0.38		200-224	1.734	0.015	
47.22	0.46		200-225	1.859	0.018	
50.39	0.46		200-226	1.984	0.018	
53.57	0.46		200-227	2.109	0.018	
56.74	0.51		200-228	2.234	0.020	
59.92	0.51		200-229	2.359	0.020	
63.09	0.51		200-230	2.484	0.020	
66.27	0.51		200-231	2.609	0.020	
69.44	0.61		200-232	2.734	0.024	
72.62	0.61		200-233	2.859	0.024	
75.79	0.61		200-234	2.984	0.024	
78.97	0.61		200-235	3.109	0.024	
82.14	0.61		200-236	3.234	0.024	
85.32	0.61		200-237	3.359	0.024	
88.49	0.61		200-238	3.484	0.024	
91.67	0.71		200-239	3.609	0.028	
94.84	0.71		200-240	3.734	0.028	
98.02	0.71		200-241	3.859	0.028	
101.19	0.71		200-242	3.984	0.028	
104.37	0.71		200-243	4.109	0.028	
107.54	0.76		200-244	4.234	0.030	
110.72	0.76		200-245	4.359	0.030	
113.89	0.76		200-246	4.484	0.030	
117.07	0.76		200-247	4.609	0.030	
120.24	0.76	200-248	4.734	0.030		
123.42	0.89	200-249	4.859	0.035		
126.59	0.89	200-250	4.984	0.035		
129.77	0.89	200-251	5.109	0.035		
132.94	0.89	200-252	5.234	0.035		
136.12	0.89	200-253	5.359	0.035		
139.29	0.89	200-254	5.484	0.035		
142.47	0.89	200-255	5.609	0.035		
145.64	0.89	200-256	5.734	0.035		
148.82	0.89	200-257	5.859	0.035		
151.99	0.89	200-258	5.984	0.035		
158.34	1.02	200-259	6.234	0.040		
164.69	1.02	200-260	6.484	0.040		
171.04	1.02	200-261	6.734	0.040		




Millimetres			Size Ref	Inches		Cross Section (inch)
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	
177.39	1.02	3.53 +/- 0.10	200-262	6.984	0.040	0.139 +/- 0.004
183.74	1.14		200-263	7.234	0.045	
190.09	1.14		200-264	7.484	0.045	
196.44	1.14		200-265	7.734	0.045	
202.79	1.14		200-266	7.984	0.045	
209.14	1.27		200-267	8.234	0.050	
215.49	1.27		200-268	8.484	0.050	
221.84	1.27		200-269	8.734	0.050	
228.19	1.27		200-270	8.984	0.050	
234.54	1.40		200-271	9.234	0.055	
240.89	1.40		200-272	9.484	0.055	
247.24	1.40		200-273	9.734	0.055	
253.59	1.40		200-274	9.984	0.055	
266.29	1.40		200-275	10.484	0.055	
278.99	1.65		200-276	10.984	0.065	
291.69	1.65		200-277	11.484	0.065	
304.39	1.65		200-278	11.984	0.065	
329.79	1.65		200-279	12.984	0.065	
355.19	1.65		200-280	13.984	0.065	
380.57	1.65		200-281	14.983	0.065	
405.26	1.91		200-282	15.955	0.075	
430.66	2.03		200-283	16.955	0.080	
456.06	2.16		200-284	17.955	0.085	
10.46	0.13		5.33 +/- 0.13	200-309	0.412	
12.07	0.13	200-310		0.475	0.005	
13.64	0.18	200-311		0.537	0.007	
15.24	0.23	200-312		0.600	0.009	
16.81	0.23	200-313		0.662	0.009	
18.42	0.25	200-314		0.725	0.010	
19.99	0.25	200-315		0.787	0.010	
21.59	0.25	200-316		0.850	0.010	
23.16	0.25	200-317		0.912	0.010	
24.77	0.25	200-318		0.975	0.010	
26.34	0.25	200-319		1.037	0.010	
27.94	0.30	200-320		1.100	0.012	
29.51	0.30	200-321		1.162	0.012	
31.12	0.30	200-322		1.225	0.012	
32.69	0.30	200-323		1.287	0.012	
34.29	0.30	200-324		1.350	0.012	
37.47	0.38	200-325		1.475	0.015	
40.64	0.38	200-326		1.600	0.015	
43.82	0.38	200-327		1.725	0.015	
46.99	0.38	200-328		1.850	0.015	
50.17	0.46	200-329		1.975	0.018	
53.34	0.46	200-330		2.100	0.018	
56.52	0.46	200-331		2.225	0.018	
59.69	0.46	200-332		2.350	0.018	
62.87	0.51	200-333		2.475	0.020	
66.04	0.51	200-334		2.600	0.020	
69.22	0.51	200-335		2.725	0.020	
72.39	0.51	200-336		2.850	0.020	
75.57	0.61	200-337		2.975	0.024	
78.74	0.61	200-338		3.100	0.024	
81.92	0.61	200-339		3.225	0.024	
85.09	0.61	200-340		3.350	0.024	
88.27	0.61	200-341		3.475	0.024	
91.44	0.71	200-342		3.600	0.028	
94.62	0.71	200-343	3.725	0.028		
97.79	0.71	200-344	3.850	0.028		
100.97	0.71	200-345	3.975	0.028		
104.14	0.71	200-346	4.100	0.028		
107.32	0.76	200-347	4.225	0.030		
110.49	0.76	200-348	4.350	0.030		
113.67	0.76	200-349	4.475	0.030		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
116.84	0.76	5.33 +/- 0.13	200-350	4.600	0.030	0.210 +/- 0.005
120.02	0.76		200-351	4.725	0.030	
123.19	0.76		200-352	4.850	0.030	
126.37	0.94		200-353	4.975	0.037	
129.54	0.94		200-354	5.100	0.037	
132.72	0.94		200-355	5.225	0.037	
135.89	0.94		200-356	5.350	0.037	
139.07	0.94		200-357	5.475	0.037	
142.24	0.94		200-358	5.600	0.037	
145.42	0.94		200-359	5.725	0.037	
148.59	0.94		200-360	5.850	0.037	
151.77	0.94		200-361	5.975	0.037	
158.12	1.02		200-362	6.225	0.040	
164.47	1.02		200-363	6.475	0.040	
170.82	1.02		200-364	6.725	0.040	
177.17	1.02		200-365	6.975	0.040	
183.52	1.14		200-366	7.225	0.045	
189.87	1.14		200-367	7.475	0.045	
196.22	1.14		200-368	7.725	0.045	
202.57	1.14		200-369	7.975	0.045	
208.92	1.27		200-370	8.225	0.050	
215.27	1.27		200-371	8.475	0.050	
221.62	1.27		200-372	8.725	0.050	
227.97	1.27		200-373	8.975	0.050	
234.32	1.40		200-374	9.225	0.055	
240.67	1.40		200-375	9.475	0.055	
247.02	1.40		200-376	9.725	0.055	
253.37	1.40		200-377	9.975	0.055	
266.07	1.52		200-378	10.475	0.060	
278.77	1.52		200-379	10.975	0.060	
291.47	1.65		200-380	11.475	0.065	
304.17	1.65		200-381	11.975	0.065	
329.57	1.65		200-382	12.975	0.065	
354.97	1.78		200-383	13.975	0.070	
380.37	1.78		200-384	14.975	0.070	
405.26	1.91		200-385	15.955	0.075	
430.66	2.03		200-386	16.955	0.080	
456.06	2.16		200-387	17.955	0.085	
481.46	2.29		200-388	18.955	0.090	
506.86	2.41	200-389	19.955	0.095		
532.26	2.41	200-390	20.955	0.095		
557.66	2.54	200-391	21.955	0.100		
582.68	2.67	200-392	22.940	0.105		
608.08	2.79	200-393	23.940	0.110		
633.48	2.92	200-394	24.940	0.115		
658.88	3.05	200-395	25.940	0.120		
113.67	0.84	6.99 +/- 0.15	200-425	4.475	0.033	0.275 +/- 0.006
116.84	0.84		200-426	4.600	0.033	
120.02	0.84		200-427	4.725	0.033	
123.20	0.84		200-428	4.850	0.033	
126.37	0.94		200-429	4.975	0.037	
129.54	0.94		200-430	5.100	0.037	
132.72	0.94		200-431	5.225	0.037	
135.90	0.94		200-432	5.350	0.037	
139.07	0.94		200-433	5.475	0.037	
142.24	0.94		200-434	5.600	0.037	
145.42	0.94		200-435	5.725	0.037	
148.60	0.94		200-436	5.850	0.037	
151.77	0.94		200-437	5.975	0.037	
158.12	1.02		200-438	6.225	0.040	
164.47	1.02		200-439	6.475	0.040	
170.82	1.02		200-440	6.725	0.040	
177.17	1.02		200-441	6.975	0.040	
183.52	1.14		200-442	7.225	0.045	




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
189.87	1.14	6.99 +/- 0.15	200-443	7.475	0.045	0.275 +/- 0.006
196.22	1.14		200-444	7.725	0.045	
202.57	1.14		200-445	7.975	0.045	
215.27	1.40		200-446	8.475	0.055	
227.97	1.40		200-447	8.975	0.055	
240.67	1.40		200-448	9.475	0.055	
253.57	1.40		200-449	9.983	0.055	
266.07	1.52		200-450	10.475	0.060	
278.77	1.52		200-451	10.975	0.060	
291.47	1.52		200-452	11.475	0.060	
304.17	1.52		200-453	11.975	0.060	
316.87	1.52		200-454	12.475	0.060	
329.57	1.52		200-455	12.975	0.060	
342.27	1.78		200-456	13.475	0.070	
354.97	1.78		200-457	13.975	0.070	
367.67	1.78		200-458	14.475	0.070	
380.37	1.78		200-459	14.975	0.070	
393.07	1.78		200-460	15.475	0.070	
405.26	1.91		200-461	15.955	0.075	
417.96	1.91		200-462	16.455	0.075	
430.66	2.03		200-463	16.955	0.080	
443.36	2.16		200-464	17.455	0.085	
456.06	2.16		200-465	17.955	0.085	
468.76	2.16		200-466	18.455	0.085	
481.46	2.29		200-467	18.955	0.090	
494.16	2.29		200-468	19.455	0.090	
506.86	2.41		200-469	19.955	0.095	
532.26	2.41		200-470	20.955	0.095	
557.66	2.54		200-471	21.955	0.100	
582.68	2.67		200-472	22.940	0.105	
608.08	2.79	200-473	23.940	0.110		
633.48	2.92	200-474	24.940	0.115		
658.88	3.05	200-475	25.940	0.120		
6.35	0.15	1.78 +/- 0.08	200-803	0.250	0.006	0.070 +/- 0.003
2.60	0.13	1.90 +/- 0.08	201-001	0.102	0.005	0.075 +/- 0.003
3.40	0.14		201-002	0.134	0.006	
4.20	0.15		201-003	0.165	0.006	
4.90	0.15		201-004	0.193	0.006	
5.70	0.16		201-005	0.224	0.006	
7.20	0.17		201-006	0.283	0.007	
8.90	0.18		201-007	0.350	0.007	
8.90	0.18	201-008	0.350	0.007	0.106 +/- 0.004	
10.50	0.19	201-009	0.413	0.007		
12.10	0.21	201-010	0.476	0.008		
13.60	0.22	201-011	0.535	0.009		
15.10	0.23	201-012	0.594	0.009		
16.90	0.24	201-013	0.665	0.009		
18.40	0.25	201-014	0.724	0.010		
18.30	0.25	201-015	0.720	0.010	0.142 +/- 0.004	
19.80	0.26	201-016	0.780	0.010		
21.30	0.28	201-017	0.839	0.011		
23.00	0.29	201-018	0.906	0.011		
24.60	0.30	201-019	0.969	0.012		
26.20	0.31	201-020	1.031	0.012		
27.80	0.32	201-021	1.094	0.013		
29.30	0.34	201-022	1.154	0.013		
30.80	0.35	201-023	1.213	0.014		
32.50	0.36	201-024	1.280	0.014		
34.10	0.37	201-025	1.343	0.015		
35.60	0.39	201-026	1.402	0.015		
37.30	0.39	201-027	1.469	0.015		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
1.15	0.13	1.00 +/- 0.08	201-110	0.045	0.005	0.039 +/- 0.003
2.20	0.15	1.60 +/- 0.08	201-111	0.087	0.005	0.063 +/- 0.003
2.40	0.15	1.90 +/- 0.08	201-112	0.094	0.005	0.075 +/- 0.003
2.75	0.15	1.60 +/- 0.08	201-121	1.083	0.005	0.063 +/- 0.003
9.52	0.15	1.78 +/- 0.08	201-128	0.375	0.006	0.07 +/- 0.003
16.00	0.20	1.90 +/- 0.08	201-132	0.630	0.008	0.075 +/- 0.003
25.00	0.20	2.40 +/- 0.08	201-139	0.984	0.008	0.094 +/- 0.003
29.10	0.20	2.55 +/- 0.08	201-140	1.146	0.008	0.100 +/- 0.003
41.40	0.30	5.30 +/- 0.13	201-149	1.630	0.012	0.209 +/- 0.005
54.40	0.40		201-153	2.142	0.016	
27.30	0.20	2.70 +/- 0.09	201-160	1.075	0.008	0.106 +/- 0.004
43.40	0.30	3.60 +/- 0.10	201-169	1.709	0.012	0.142 +/- 0.004
3.10	0.15	1.60 +/- 0.08	202-505	0.122	0.006	0.063 +/- 0.003
3.10	0.15		202-505	0.122	0.006	
4.10	0.15		202-506	0.161	0.006	
4.10	0.15		202-506	0.161	0.006	
5.10	0.15		202-507	0.201	0.006	
5.10	0.15		202-507	0.201	0.006	
6.10	0.15		202-508	0.240	0.006	
6.10	0.15		202-508	0.240	0.006	
7.10	0.15		202-509	0.280	0.006	
7.10	0.15		202-509	0.280	0.006	
8.10	0.15		202-510	0.319	0.006	
8.10	0.15		202-510	0.319	0.006	
9.10	0.15		202-511	0.358	0.006	
9.10	0.15		202-511	0.358	0.006	
10.10	0.20		202-512	0.398	0.008	
10.10	0.20		202-512	0.398	0.008	
11.10	0.20		202-513	0.437	0.008	
11.10	0.20		202-513	0.437	0.008	
12.10	0.20		202-514	0.476	0.008	
12.10	0.20		202-514	0.476	0.008	
13.10	0.20		202-515	0.516	0.008	
13.10	0.20		202-515	0.516	0.008	
14.10	0.20		202-516	0.555	0.008	
14.10	0.20		202-516	0.555	0.008	
15.10	0.20		202-517	0.594	0.008	
15.10	0.20		202-517	0.594	0.008	
16.10	0.20		202-518	0.634	0.008	
16.10	0.20		202-518	0.634	0.008	
17.10	0.20		202-519	0.673	0.008	
17.10	0.20		202-519	0.673	0.008	
18.10	0.25		202-520	0.713	0.010	
18.10	0.25		202-520	0.713	0.010	
19.10	0.25	202-521	0.752	0.010		
19.10	0.25	202-521	0.752	0.010		
20.10	0.25	202-522	0.791	0.010		
21.10	0.25	202-523	0.831	0.010		
22.10	0.25	202-524	0.870	0.010		
22.10	0.25	202-524	0.870	0.010		
25.10	0.25	202-525	0.988	0.010		




Millimetres			Size Ref	Inches				
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)		
25.10	0.25	1.60 +/- 0.08	202-525	0.988	0.010	0.063 +/- 0.003		
27.10	0.25		202-526	1.067	0.010			
27.10	0.25		202-526	1.067	0.010			
29.10	0.25		202-527	1.146	0.010			
29.10	0.25		202-527	1.146	0.010			
32.10	0.30		202-528	1.264	0.012			
32.10	0.30		202-528	1.264	0.012			
35.10	0.30		202-529	1.382	0.012			
35.10	0.30		202-529	1.382	0.012			
37.10	0.30		202-530	1.461	0.012			
37.10	0.30		202-530	1.461	0.012			
3.30	0.15		2.40 +/- 0.08	202-605	0.130		0.006	0.094 +/- 0.003
4.30	0.15			202-606	0.169		0.006	
5.30	0.15			202-607	0.209		0.006	
6.30	0.15	202-608		0.248	0.006			
7.30	0.15	202-609		0.287	0.006			
8.30	0.15	202-610		0.327	0.006			
9.30	0.15	202-611		0.366	0.006			
10.30	0.20	202-612		0.406	0.008			
11.30	0.20	202-613		0.445	0.008			
12.30	0.20	202-614		0.484	0.008			
13.30	0.20	202-615		0.524	0.008			
14.30	0.20	202-616		0.563	0.008			
15.30	0.20	202-617		0.602	0.008			
16.30	0.20	202-618		0.642	0.008			
17.30	0.20	202-619		0.681	0.008			
18.30	0.25	202-620		0.720	0.010			
19.30	0.25	202-621		0.760	0.010			
20.30	0.25	202-622		0.799	0.010			
21.30	0.25	202-623		0.839	0.010			
22.30	0.25	202-624		0.878	0.010			
23.30	0.25	202-625		0.917	0.010			
25.30	0.25	202-626		0.996	0.010			
27.30	0.25	202-627		1.075	0.010			
30.30	0.30	202-628		1.193	0.012			
33.30	0.30	202-629		1.311	0.012			
3.60	0.15	202-630		0.142	0.006			
4.60	0.15	202-631		0.181	0.006			
5.60	0.15	202-632		0.220	0.006			
6.60	0.15	202-633		0.260	0.006			
7.60	0.15	202-634		0.299	0.006			
8.60	0.15	202-635		0.339	0.006			
9.60	0.15	202-636		0.378	0.006			
10.60	0.20	202-637		0.417	0.008			
11.60	0.20	202-638		0.457	0.008			
12.60	0.20	202-639		0.496	0.008			
13.60	0.20	202-640		0.535	0.008			
14.60	0.20	202-641		0.575	0.008			
15.60	0.20	202-642		0.614	0.008			
16.60	0.20	202-643		0.654	0.008			
17.60	0.20	202-644		0.693	0.008			
18.60	0.25	202-645		0.732	0.010			
19.60	0.25	202-646		0.772	0.010			
21.60	0.25	202-647	0.850	0.010				
24.60	0.25	202-648	0.969	0.010				
27.60	0.25	202-649	1.087	0.010				
29.60	0.25	202-650	1.165	0.010				
31.60	0.30	202-651	1.244	0.012				
34.60	0.30	202-652	1.362	0.012				
37.60	0.30	202-653	1.480	0.012				
39.60	0.30	202-654	1.559	0.012				
41.60	0.30	202-655	1.638	0.012				
44.60	0.30	202-656	1.756	0.012				
47.60	0.30	202-657	1.874	0.012				




Millimetres			Size Ref	Inches			
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)	
49.60	0.30	2.40 +/- 0.08	202-658	1.953	0.012	0.094 +/- 0.003	
51.60	0.40		202-659	2.031	0.016		
54.60	0.40		202-660	2.150	0.016		
57.60	0.40		202-661	2.268	0.016		
59.60	0.40		202-662	2.346	0.016		
61.60	0.40		202-663	2.425	0.016		
64.60	0.40		202-664	2.543	0.016		
67.60	0.40		202-665	2.661	0.016		
69.60	0.40		202-666	2.740	0.016		
20.60	0.25		202-670	0.811	0.010		
35.60	0.30		202-672	1.402	0.012		
45.60	0.30		202-673	1.795	0.012		
55.60	0.40		202-674	2.189	0.016		
58.60	0.40		202-675	2.307	0.016		
62.60	0.40		202-676	2.465	0.016		
17.20	0.20		202-705	0.677	0.008		0.118 +/- 0.004
18.20	0.25		202-706	0.717	0.010		
19.20	0.25		202-707	0.756	0.010		
20.20	0.25	202-708	0.795	0.010			
21.20	0.25	202-709	0.835	0.010			
22.20	0.25	202-710	0.874	0.010			
24.20	0.25	202-711	0.953	0.010			
25.20	0.25	202-712	0.992	0.010			
26.20	0.25	202-713	1.031	0.010			
28.20	0.25	202-714	1.110	0.010			
29.20	0.25	202-715	1.150	0.010			
30.20	0.30	202-716	1.189	0.012			
31.20	0.30	202-717	1.228	0.012			
32.20	0.30	202-718	1.268	0.012			
34.20	0.30	202-719	1.346	0.012			
35.20	0.30	202-720	1.386	0.012			
36.20	0.30	202-721	1.425	0.012			
37.20	0.30	202-722	1.465	0.012			
39.20	0.30	202-723	1.543	0.012			
40.20	0.30	202-724	1.583	0.012			
42.20	0.30	202-725	1.661	0.012			
44.20	0.30	202-726	1.740	0.012			
45.20	0.30	202-727	1.780	0.012			
46.20	0.30	202-728	1.819	0.012			
49.50	0.30	202-729	1.949	0.012			
49.50	0.30	202-729	1.949	0.012			
50.20	0.40	202-730	1.976	0.016			
54.50	0.40	202-731	2.146	0.016			
54.50	0.40	202-731	2.146	0.016			
55.20	0.40	202-732	2.173	0.016			
56.20	0.40	202-733	2.213	0.016			
57.20	0.40	202-734	2.252	0.016			
59.50	0.40	202-735	2.343	0.016			
59.50	0.40	202-735	2.343	0.016			
60.50	0.40	202-736	2.382	0.016			
62.20	0.40	202-737	2.449	0.016			
64.50	0.40	202-738	2.539	0.016			
64.50	0.40	202-738	2.539	0.016			
69.50	0.40	202-739	2.736	0.016			
69.50	0.40	202-739	2.736	0.016			
74.50	0.40	202-740	2.933	0.016			
74.50	0.40	202-740	2.933	0.016			
79.50	0.40	202-741	3.130	0.016			
79.50	0.40	202-741	3.130	0.016			
84.50	0.50	202-742	3.327	0.020			
84.50	0.50	202-742	3.327	0.020			
89.50	0.50	202-743	3.524	0.020			
89.50	0.50	202-743	3.524	0.020			
94.50	0.50	202-744	3.720	0.020			




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
94.50	0.50	3.00 +/- 0.10	202-744	3.720	0.020	0.118 +/- 0.004
99.50	0.50		202-745	3.917	0.020	
99.50	0.50		202-745	3.917	0.020	
104.50	0.50		202-746	4.114	0.020	
104.50	0.50		202-746	4.114	0.020	
109.50	0.50		202-747	4.311	0.020	
109.50	0.50		202-747	4.311	0.020	
114.50	0.50		202-748	4.508	0.020	
114.50	0.50		202-748	4.508	0.020	
119.50	0.50		202-749	4.705	0.020	
119.50	0.50		202-749	4.705	0.020	
124.50	0.60		202-750	4.902	0.024	
124.50	0.60		202-750	4.902	0.024	
129.50	0.60		202-751	5.098	0.024	
129.50	0.60		202-751	5.098	0.024	
134.50	0.60		202-752	5.295	0.024	
134.50	0.60		202-752	5.295	0.024	
139.50	0.60		202-753	5.492	0.024	
139.50	0.60		202-753	5.492	0.024	
144.50	0.60		202-754	5.689	0.024	
144.50	0.60		202-754	5.689	0.024	
149.50	0.60		202-755	5.886	0.024	
154.50	0.60		202-756	6.083	0.024	
159.50	0.60		202-757	6.280	0.024	
164.50	0.60		202-758	6.476	0.024	
169.50	0.60		202-759	6.673	0.024	
174.50	0.60		202-760	6.870	0.024	
179.50	0.60		202-761	7.067	0.024	
184.50	0.80		202-762	7.264	0.031	
189.50	0.80		202-763	7.461	0.031	
194.50	0.80		202-764	7.657	0.031	
199.50	0.80		202-765	7.854	0.031	
219.50	0.80		202-767	8.642	0.031	
229.50	0.80		202-768	9.035	0.031	
239.50	0.80		202-769	9.429	0.031	
249.50	0.80		202-770	9.823	0.031	
19.50	0.25		202-771	0.768	0.010	
21.50	0.25		202-772	0.846	0.010	
22.50	0.25		202-773	0.886	0.010	
24.50	0.25		202-774	0.965	0.010	
25.50	0.25		202-775	1.004	0.010	
26.50	0.25		202-776	1.043	0.010	
27.50	0.25		202-777	1.083	0.010	
29.50	0.25		202-778	1.161	0.010	
31.50	0.30		202-779	1.240	0.012	
32.50	0.30		202-780	1.280	0.012	
34.50	0.30		202-781	1.358	0.012	
35.50	0.30		202-782	1.398	0.012	
36.50	0.30		202-783	1.437	0.012	
37.50	0.30		202-784	1.476	0.012	
39.50	0.30		202-785	1.555	0.012	
41.50	0.30		202-786	1.634	0.012	
42.50	0.30		202-787	1.673	0.012	
44.50	0.30		202-788	1.752	0.012	
209.50	0.80		202-789	8.248	0.031	
55.50	0.40		202-790	2.185	0.016	
57.50	0.40		202-791	2.264	0.016	
62.50	0.40		202-792	2.461	0.016	
244.50	0.80	202-793	9.626	0.031		
35.20	0.30	202-805	1.386	0.012	0.224 +/- 0.005	
36.20	0.30	202-806	1.425	0.012		
37.20	0.30	202-807	1.465	0.012		
39.20	0.30	202-808	1.543	0.012		
41.20	0.30	202-809	1.622	0.012		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
44.30	0.30	5.70 +/- 0.13	202-810	1.744	0.012	0.224 +/- 0.005
45.30	0.30		202-811	1.783	0.012	
47.30	0.30		202-812	1.862	0.012	
49.30	0.30		202-813	1.941	0.012	
51.30	0.40		202-814	2.020	0.016	
52.30	0.40		202-815	2.059	0.016	
54.30	0.40		202-816	2.138	0.016	
57.30	0.40		202-817	2.256	0.016	
59.30	0.40		202-818	2.335	0.016	
61.30	0.40		202-819	2.413	0.016	
62.30	0.40		202-820	2.453	0.016	
64.30	0.40		202-821	2.531	0.016	
67.30	0.40		202-822	2.650	0.016	
69.30	0.40		202-823	2.728	0.016	
71.30	0.40		202-824	2.807	0.016	
72.30	0.40		202-825	2.846	0.016	
74.30	0.40		202-826	2.925	0.016	
77.30	0.40		202-827	3.043	0.016	
79.30	0.40		202-828	3.122	0.016	
81.30	0.50		202-829	3.201	0.020	
82.30	0.50		202-830	3.240	0.020	
84.30	0.50		202-831	3.319	0.020	
87.30	0.50		202-832	3.437	0.020	
89.30	0.50		202-833	3.516	0.020	
92.30	0.50		202-834	3.634	0.020	
94.30	0.50		202-835	3.713	0.020	
97.30	0.50		202-836	3.831	0.020	
99.30	0.50		202-837	3.909	0.020	
104.30	0.50		202-838	4.106	0.020	
109.30	0.50		202-839	4.303	0.020	
114.30	0.50		202-840	4.500	0.020	
119.30	0.50		202-841	4.697	0.020	
124.30	0.60		202-842	4.894	0.024	
129.30	0.60		202-843	5.091	0.024	
134.30	0.60		202-844	5.287	0.024	
139.30	0.60		202-845	5.484	0.024	
144.30	0.60		202-846	5.681	0.024	
149.30	0.60		202-847	5.878	0.024	
154.30	0.60		202-848	6.075	0.024	
159.30	0.60		202-849	6.272	0.024	
164.30	0.60		202-850	6.469	0.024	
169.30	0.60		202-851	6.665	0.024	
174.30	0.60	202-852	6.862	0.024		
179.30	0.60	202-853	7.059	0.024		
184.30	0.60	202-854	7.256	0.024		
189.30	0.80	202-855	7.453	0.031		
194.30	0.80	202-856	7.650	0.031		
199.30	0.80	202-857	7.846	0.031		
204.30	0.80	202-858	8.043	0.031		
209.30	0.80	202-859	8.240	0.031		
219.30	0.80	202-860	8.634	0.031		
229.30	0.80	202-861	9.028	0.031		
239.30	0.80	202-862	9.421	0.031		
249.30	0.80	202-863	9.815	0.031		
259.30	1.00	202-864	10.209	0.039		
269.30	1.00	202-865	10.602	0.039		
279.30	1.00	202-866	10.996	0.039		
289.30	1.00	202-867	11.390	0.039		
299.30	1.00	202-868	11.783	0.039		
319.30	1.50	202-869	12.571	0.059		
339.30	1.50	202-870	13.358	0.059		
359.30	1.50	202-871	14.146	0.059		
379.30	1.50	202-872	14.933	0.059		
399.30	1.50	202-873	15.720	0.059		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
419.30	2.00	5.70 +/- 0.13	202-874	16.508	0.079	0.224 +/- 0.005
439.30	2.00		202-875	17.295	0.079	
459.30	2.00		202-876	18.083	0.079	
479.30	2.00		202-877	18.870	0.079	
499.30	2.00		202-878	19.657	0.079	
55.30	0.40		202-879	2.177	0.016	
309.30	1.50		202-890	12.177	0.059	
389.30	1.50		202-891	15.327	0.059	
489.30	2.00		202-892	19.264	0.079	
144.10	0.60		8.40 +/- 0.15	202-905	5.673	
149.10	0.60	202-906		5.870	0.024	
154.10	0.60	202-907		6.067	0.024	
159.10	0.60	202-908		6.264	0.024	
164.10	0.60	202-909		6.461	0.024	
169.10	0.60	202-910		6.657	0.024	
174.10	0.60	202-911		6.854	0.024	
179.10	0.60	202-912		7.051	0.024	
184.10	0.80	202-913		7.248	0.031	
189.10	0.80	202-914		7.445	0.031	
194.10	0.80	202-915		7.642	0.031	
199.10	0.80	202-916		7.839	0.031	
209.10	0.80	202-917		8.232	0.031	
219.10	0.80	202-918		8.626	0.031	
229.10	0.80	202-919		9.020	0.031	
239.10	0.80	202-920		9.413	0.031	
249.10	0.80	202-921		9.807	0.031	
204.10	0.80	202-922		8.035	0.031	
234.10	0.80	202-923		9.217	0.031	
3.00	0.15	2.00 +/- 0.08		204-003	0.118	0.006
4.00	0.15		204-004	0.157	0.006	
5.00	0.15		204-005	0.197	0.006	
6.00	0.15		204-006	0.236	0.006	
7.00	0.15		204-007	0.276	0.006	
8.00	0.15		204-008	0.315	0.006	
9.00	0.15		204-009	0.354	0.006	
10.00	0.20		204-010	0.394	0.008	
11.00	0.20		204-011	0.433	0.008	
12.00	0.20		204-012	0.472	0.008	
13.00	0.20		204-013	0.512	0.008	
14.00	0.20		204-014	0.551	0.008	
15.00	0.20		204-015	0.591	0.008	
16.00	0.20		204-016	0.630	0.008	
17.00	0.20		204-017	0.669	0.008	
18.00	0.20		204-018	0.709	0.008	
19.00	0.25		204-019	0.748	0.010	
20.00	0.25		204-020	0.787	0.010	
21.00	0.25		204-021	0.827	0.010	
22.00	0.25		204-022	0.866	0.010	
23.00	0.25		204-023	0.906	0.010	
24.00	0.25		204-024	0.945	0.010	
25.00	0.25		204-025	0.984	0.010	
26.00	0.25		204-026	1.024	0.010	
27.00	0.25		204-027	1.063	0.010	
28.00	0.25		204-028	1.102	0.010	
29.00	0.25		204-029	1.142	0.010	
30.00	0.25		204-030	1.181	0.010	
31.00	0.30		204-031	1.220	0.012	
32.00	0.30		204-032	1.260	0.012	
33.00	0.30	204-033	1.299	0.012		
34.00	0.30	204-034	1.339	0.012		
35.00	0.30	204-035	1.378	0.012		
36.00	0.30	204-036	1.417	0.012		
37.00	0.30	204-037	1.457	0.012		
38.00	0.30	204-038	1.496	0.012		




Millimetres			Size Ref	Inches				
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)		
39.00	0.30	2.00 +/- 0.08	204-039	1.535	0.012	0.079 +/- 0.003		
40.00	0.30		204-040	1.575	0.012			
41.00	0.30		204-041	1.614	0.012			
42.00	0.30		204-042	1.654	0.012			
43.00	0.30		204-043	1.693	0.012			
44.00	0.30		204-044	1.732	0.012			
45.00	0.30		204-045	1.772	0.012			
46.00	0.30		204-046	1.811	0.012			
47.00	0.30		204-047	1.850	0.012			
48.00	0.30		204-048	1.890	0.012			
49.00	0.30		204-049	1.929	0.012			
50.00	0.30		204-050	1.969	0.012			
51.00	0.40		204-051	2.008	0.016			
52.00	0.40		204-052	2.047	0.016			
53.00	0.40		204-053	2.087	0.016			
54.00	0.40		204-054	2.126	0.016			
55.00	0.40		204-055	2.165	0.016			
56.00	0.40		204-056	2.205	0.016			
57.00	0.40		204-057	2.244	0.016			
58.00	0.40		204-058	2.283	0.016			
59.00	0.40		204-059	2.323	0.016			
60.00	0.40		204-060	2.362	0.016			
61.00	0.40		204-061	2.402	0.016			
62.00	0.40		204-062	2.441	0.016			
63.00	0.40		204-063	2.480	0.016			
64.00	0.40		204-064	2.520	0.016			
65.00	0.40		204-065	2.559	0.016			
66.00	0.40		204-066	2.598	0.016			
67.00	0.40		204-067	2.638	0.016			
68.00	0.40		204-068	2.677	0.016			
69.00	0.40		204-069	2.717	0.016			
70.00	0.40		204-070	2.756	0.016			
71.00	0.40		204-071	2.795	0.016			
72.00	0.40		204-072	2.835	0.016			
73.00	0.40		204-073	2.874	0.016			
74.00	0.40		204-074	2.913	0.016			
75.00	0.40		204-075	2.953	0.016			
76.00	0.40		204-076	2.992	0.016			
77.00	0.40		204-077	3.031	0.016			
78.00	0.40		204-078	3.071	0.016			
79.00	0.40		204-079	3.110	0.016			
80.00	0.40		204-080	3.150	0.016			
81.00	0.50		204-081	3.189	0.020			
82.00	0.50		204-082	3.228	0.020			
83.00	0.50		204-083	3.268	0.020			
84.00	0.50		204-084	3.307	0.020			
85.00	0.50		204-085	3.346	0.020			
86.00	0.50		204-086	3.386	0.020			
87.00	0.50		204-087	3.425	0.020			
88.00	0.50		204-088	3.465	0.020			
89.00	0.50		204-089	3.504	0.020			
90.00	0.50		204-090	3.543	0.020			
91.00	0.50		204-091	3.583	0.020			
92.00	0.50		204-092	3.622	0.020			
93.00	0.50		204-093	3.661	0.020			
94.00	0.50		204-094	3.701	0.020			
95.00	0.50		204-095	3.740	0.020			
96.00	0.50		204-096	3.780	0.020			
97.00	0.50		204-097	3.819	0.020			
98.00	0.50		204-098	3.858	0.020			
99.00	0.50		204-099	3.898	0.020			
100.00	0.50		204-100	3.937	0.020			
4.00	0.15		4.00	204-104	0.157		0.006	0.157
5.00	0.15		+/- 0.12	204-105	0.197		0.006	+/- 0.005




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
6.00	0.15	4.00 +/- 0.12	204-106	0.236	0.006	0.157 +/- 0.005
7.00	0.15		204-107	0.276	0.006	
8.00	0.15		204-108	0.315	0.006	
9.00	0.15		204-109	0.354	0.006	
10.00	0.20		204-110	0.394	0.008	
11.00	0.20		204-111	0.433	0.008	
12.00	0.20		204-112	0.472	0.008	
13.00	0.20		204-113	0.512	0.008	
14.00	0.20		204-114	0.551	0.008	
15.00	0.20		204-115	0.591	0.008	
16.00	0.20		204-116	0.630	0.008	
17.00	0.20		204-117	0.669	0.008	
18.00	0.20		204-118	0.709	0.008	
19.00	0.25		204-119	0.748	0.010	
20.00	0.25		204-120	0.787	0.010	
21.00	0.25		204-121	0.827	0.010	
22.00	0.25		204-122	0.866	0.010	
23.00	0.25		204-123	0.906	0.010	
24.00	0.25		204-124	0.945	0.010	
25.00	0.25		204-125	0.984	0.010	
26.00	0.25		204-126	1.024	0.010	
27.00	0.25		204-127	1.063	0.010	
28.00	0.25		204-128	1.102	0.010	
29.00	0.25		204-129	1.142	0.010	
30.00	0.25		204-130	1.181	0.010	
31.00	0.30		204-131	1.220	0.012	
32.00	0.30		204-132	1.260	0.012	
33.00	0.30		204-133	1.299	0.012	
34.00	0.30		204-134	1.339	0.012	
35.00	0.30		204-135	1.378	0.012	
36.00	0.30		204-136	1.417	0.012	
37.00	0.30		204-137	1.457	0.012	
38.00	0.30		204-138	1.496	0.012	
39.00	0.30		204-139	1.535	0.012	
40.00	0.30		204-140	1.575	0.012	
41.00	0.30		204-141	1.614	0.012	
42.00	0.30		204-142	1.654	0.012	
43.00	0.30		204-143	1.693	0.012	
44.00	0.30		204-144	1.732	0.012	
45.00	0.30		204-145	1.772	0.012	
46.00	0.30		204-146	1.811	0.012	
47.00	0.30		204-147	1.850	0.012	
48.00	0.30		204-148	1.890	0.012	
49.00	0.30		204-149	1.929	0.012	
50.00	0.30		204-150	1.969	0.012	
51.00	0.40		204-151	2.008	0.016	
52.00	0.40		204-152	2.047	0.016	
53.00	0.40		204-153	2.087	0.016	
54.00	0.40		204-154	2.126	0.016	
55.00	0.40		204-155	2.165	0.016	
56.00	0.40		204-156	2.205	0.016	
57.00	0.40		204-157	2.244	0.016	
58.00	0.40		204-158	2.283	0.016	
59.00	0.40		204-159	2.323	0.016	
60.00	0.40		204-160	2.362	0.016	
61.00	0.40		204-161	2.402	0.016	
62.00	0.40		204-162	2.441	0.016	
63.00	0.40		204-163	2.480	0.016	
64.00	0.40		204-164	2.520	0.016	
65.00	0.40		204-165	2.559	0.016	
66.00	0.40		204-166	2.598	0.016	
67.00	0.40		204-167	2.638	0.016	
68.00	0.40		204-168	2.677	0.016	
69.00	0.40		204-169	2.717	0.016	




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
70.00	0.40	4.00 +/- 0.12	204-170	2.756	0.016	0.157 +/- 0.005
71.00	0.40		204-171	2.795	0.016	
72.00	0.40		204-172	2.835	0.016	
73.00	0.40		204-173	2.874	0.016	
74.00	0.40		204-174	2.913	0.016	
75.00	0.40		204-175	2.953	0.016	
76.00	0.40		204-176	2.992	0.016	
77.00	0.40		204-177	3.031	0.016	
78.00	0.40		204-178	3.071	0.016	
79.00	0.40		204-179	3.110	0.016	
80.00	0.40		204-180	3.150	0.016	
81.00	0.50		204-181	3.189	0.020	
82.00	0.50		204-182	3.228	0.020	
83.00	0.50		204-183	3.268	0.020	
84.00	0.50		204-184	3.307	0.020	
85.00	0.50		204-185	3.346	0.020	
86.00	0.50		204-186	3.386	0.020	
87.00	0.50		204-187	3.425	0.020	
88.00	0.50		204-188	3.465	0.020	
89.00	0.50		204-189	3.504	0.020	
90.00	0.50		204-190	3.543	0.020	
91.00	0.50		204-191	3.583	0.020	
92.00	0.50		204-192	3.622	0.020	
93.00	0.50		204-193	3.661	0.020	
94.00	0.50		204-194	3.701	0.020	
95.00	0.50		204-195	3.740	0.020	
96.00	0.50		204-196	3.780	0.020	
97.00	0.50		204-197	3.819	0.020	
98.00	0.50		204-198	3.858	0.020	
99.00	0.50		204-199	3.898	0.020	
100.00	0.50		204-200	3.937	0.020	
101.00	0.50		204-201	3.976	0.020	
102.00	0.50		204-202	4.016	0.020	
103.00	0.50		204-203	4.055	0.020	
104.00	0.50		204-204	4.094	0.020	
105.00	0.50		204-205	4.134	0.020	
106.00	0.50		204-206	4.173	0.020	
107.00	0.50		204-207	4.213	0.020	
108.00	0.50		204-208	4.252	0.020	
109.00	0.50		204-209	4.291	0.020	
110.00	0.50		204-210	4.331	0.020	
111.00	0.50		204-211	4.370	0.020	
112.00	0.50		204-212	4.409	0.020	
113.00	0.50		204-213	4.449	0.020	
114.00	0.50		204-214	4.488	0.020	
115.00	0.50		204-215	4.528	0.020	
116.00	0.50		204-216	4.567	0.020	
117.00	0.50		204-217	4.606	0.020	
118.00	0.50		204-218	4.646	0.020	
119.00	0.50		204-219	4.685	0.020	
120.00	0.50		204-220	4.724	0.020	
121.00	0.60		204-221	4.764	0.024	
122.00	0.60		204-222	4.803	0.024	
123.00	0.60		204-223	4.843	0.024	
124.00	0.60		204-224	4.882	0.024	
125.00	0.60		204-225	4.921	0.024	
126.00	0.60		204-226	4.961	0.024	
127.00	0.60		204-227	5.000	0.024	
128.00	0.60		204-228	5.039	0.024	
129.00	0.60		204-229	5.079	0.024	
130.00	0.60		204-230	5.118	0.024	
131.00	0.60		204-231	5.157	0.024	
132.00	0.60		204-232	5.197	0.024	
133.00	0.60		204-233	5.236	0.024	




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
134.00	0.60	4.00 +/- 0.12	204-234	5.276	0.024	0.157 +/- 0.005
135.00	0.60		204-235	5.315	0.024	
136.00	0.60		204-236	5.354	0.024	
137.00	0.60		204-237	5.394	0.024	
138.00	0.60		204-238	5.433	0.024	
139.00	0.60		204-239	5.472	0.024	
140.00	0.60		204-240	5.512	0.024	
141.00	0.60		204-241	5.551	0.024	
142.00	0.60		204-242	5.591	0.024	
143.00	0.60		204-243	5.630	0.024	
144.00	0.60		204-244	5.669	0.024	
145.00	0.60		204-245	5.709	0.024	
146.00	0.60		204-246	5.748	0.024	
147.00	0.60		204-247	5.787	0.024	
148.00	0.60		204-248	5.827	0.024	
149.00	0.60		204-249	5.866	0.024	
150.00	0.60		204-250	5.906	0.024	
151.00	0.60		204-251	5.945	0.024	
152.00	0.60		204-252	5.984	0.024	
153.00	0.60		204-253	6.024	0.024	
154.00	0.60		204-254	6.063	0.024	
155.00	0.60		204-255	6.102	0.024	
156.00	0.60		204-256	6.142	0.024	
157.00	0.60		204-257	6.181	0.024	
158.00	0.60		204-258	6.220	0.024	
159.00	0.60		204-259	6.260	0.024	
160.00	0.60		204-260	6.299	0.024	
161.00	0.60		204-261	6.339	0.024	
162.00	0.60		204-262	6.378	0.024	
163.00	0.60		204-263	6.417	0.024	
164.00	0.60		204-264	6.457	0.024	
165.00	0.60		204-265	6.496	0.024	
166.00	0.60		204-266	6.535	0.024	
167.00	0.60		204-267	6.575	0.024	
168.00	0.60		204-268	6.614	0.024	
169.00	0.60		204-269	6.654	0.024	
170.00	0.60		204-270	6.693	0.024	
171.00	0.60		204-271	6.732	0.024	
172.00	0.60		204-272	6.772	0.024	
173.00	0.60		204-273	6.811	0.024	
174.00	0.60		204-274	6.850	0.024	
175.00	0.60		204-275	6.890	0.024	
176.00	0.60		204-276	6.929	0.024	
177.00	0.60		204-277	6.969	0.024	
178.00	0.60		204-278	7.008	0.024	
179.00	0.60		204-279	7.047	0.024	
180.00	0.60		204-280	7.087	0.024	
181.00	0.80	204-281	7.126	0.031		
182.00	0.80	204-282	7.165	0.031		
183.00	0.80	204-283	7.205	0.031		
184.00	0.80	204-284	7.244	0.031		
185.00	0.80	204-285	7.283	0.031		
186.00	0.80	204-286	7.323	0.031		
187.00	0.80	204-287	7.362	0.031		
188.00	0.80	204-288	7.402	0.031		
189.00	0.80	204-289	7.441	0.031		
190.00	0.80	204-290	7.480	0.031		
191.00	0.80	204-291	7.520	0.031		
192.00	0.80	204-292	7.559	0.031		
193.00	0.80	204-293	7.598	0.031		
194.00	0.80	204-294	7.638	0.031		
195.00	0.80	204-295	7.677	0.031		
196.00	0.80	204-296	7.717	0.031		
197.00	0.80	204-297	7.756	0.031		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
198.00	0.80	4.00 +/- 0.12	204-298	7.795	0.031	0.157 +/- 0.005
199.00	0.80		204-299	7.835	0.031	
200.00	0.80		204-300	7.874	0.031	
201.00	0.80		204-301	7.913	0.031	
202.00	0.80		204-302	7.953	0.031	
203.00	0.80		204-303	7.992	0.031	
204.00	0.80		204-304	8.031	0.031	
205.00	0.80		204-305	8.071	0.031	
206.00	0.80		204-306	8.110	0.031	
207.00	0.80		204-307	8.150	0.031	
208.00	0.80		204-308	8.189	0.031	
209.00	0.80		204-309	8.228	0.031	
210.00	0.80		204-310	8.268	0.031	
211.00	0.80		204-311	8.307	0.031	
212.00	0.80		204-312	8.346	0.031	
213.00	0.80		204-313	8.386	0.031	
214.00	0.80		204-314	8.425	0.031	
215.00	0.80		204-315	8.465	0.031	
216.00	0.80		204-316	8.504	0.031	
217.00	0.80		204-317	8.543	0.031	
218.00	0.80		204-318	8.583	0.031	
219.00	0.80		204-319	8.622	0.031	
220.00	0.80		204-320	8.661	0.031	
221.00	0.80		204-321	8.701	0.031	
222.00	0.80		204-322	8.740	0.031	
223.00	0.80		204-323	8.780	0.031	
224.00	0.80		204-324	8.819	0.031	
225.00	0.80		204-325	8.858	0.031	
226.00	0.80		204-326	8.898	0.031	
227.00	0.80		204-327	8.937	0.031	
228.00	0.80		204-328	8.976	0.031	
229.00	0.80		204-329	9.016	0.031	
230.00	0.80		204-330	9.055	0.031	
231.00	0.80		204-331	9.094	0.031	
232.00	0.80		204-332	9.134	0.031	
233.00	0.80		204-333	9.173	0.031	
234.00	0.80		204-334	9.213	0.031	
235.00	0.80		204-335	9.252	0.031	
236.00	0.80		204-336	9.291	0.031	
237.00	0.80		204-337	9.331	0.031	
238.00	0.80		204-338	9.370	0.031	
239.00	0.80		204-339	9.409	0.031	
240.00	0.80		204-340	9.449	0.031	
241.00	0.80		204-341	9.488	0.031	
242.00	0.80		204-342	9.528	0.031	
243.00	0.80		204-343	9.567	0.031	
244.00	0.80		204-344	9.606	0.031	
245.00	0.80		204-345	9.646	0.031	
246.00	0.80		204-346	9.685	0.031	
247.00	0.80		204-347	9.724	0.031	
248.00	0.80		204-348	9.764	0.031	
249.00	0.80		204-349	9.803	0.031	
250.00	0.80		204-350	9.843	0.031	
251.00	1.00		204-351	9.882	0.039	
252.00	1.00		204-352	9.921	0.039	
253.00	1.00		204-353	9.961	0.039	
254.00	1.00		204-354	10.000	0.039	
255.00	1.00		204-355	10.039	0.039	
256.00	1.00		204-356	10.079	0.039	
257.00	1.00		204-357	10.118	0.039	
258.00	1.00		204-358	10.157	0.039	
259.00	1.00	204-359	10.197	0.039		
260.00	1.00	204-360	10.236	0.039		
261.00	1.00	204-361	10.276	0.039		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
262.00	1.00	4.00 +/- 0.12	204-362	10.315	0.039	0.157 +/- 0.005
263.00	1.00		204-363	10.354	0.039	
264.00	1.00		204-364	10.394	0.039	
265.00	1.00		204-365	10.433	0.039	
266.00	1.00		204-366	10.472	0.039	
267.00	1.00		204-367	10.512	0.039	
268.00	1.00		204-368	10.551	0.039	
269.00	1.00		204-369	10.591	0.039	
270.00	1.00		204-370	10.630	0.039	
271.00	1.00		204-371	10.669	0.039	
272.00	1.00		204-372	10.709	0.039	
273.00	1.00		204-373	10.748	0.039	
274.00	1.00		204-374	10.787	0.039	
275.00	1.00		204-375	10.827	0.039	
276.00	1.00		204-376	10.866	0.039	
277.00	1.00		204-377	10.906	0.039	
278.00	1.00		204-378	10.945	0.039	
279.00	1.00		204-379	10.984	0.039	
280.00	1.00		204-380	11.024	0.039	
281.00	1.00		204-381	11.063	0.039	
282.00	1.00		204-382	11.102	0.039	
283.00	1.00		204-383	11.142	0.039	
284.00	1.00		204-384	11.181	0.039	
285.00	1.00		204-385	11.220	0.039	
286.00	1.00		204-386	11.260	0.039	
287.00	1.00		204-387	11.299	0.039	
288.00	1.00		204-388	11.339	0.039	
289.00	1.00		204-389	11.378	0.039	
290.00	1.00		204-390	11.417	0.039	
291.00	1.00		204-391	11.457	0.039	
292.00	1.00		204-392	11.496	0.039	
293.00	1.00		204-393	11.535	0.039	
294.00	1.00		204-394	11.575	0.039	
295.00	1.00		204-395	11.614	0.039	
296.00	1.00		204-396	11.654	0.039	
297.00	1.00		204-397	11.693	0.039	
298.00	1.00		204-398	11.732	0.039	
299.00	1.00		204-399	11.772	0.039	
300.00	1.00		204-400	11.811	0.039	
301.00	1.50		204-401	11.850	0.059	
302.00	1.50		204-402	11.890	0.059	
303.00	1.50		204-403	11.929	0.059	
304.00	1.50	204-404	11.969	0.059		
305.00	1.50	204-405	12.008	0.059		
306.00	1.50	204-406	12.047	0.059		
307.00	1.50	204-407	12.087	0.059		
308.00	1.50	204-408	12.126	0.059		
309.00	1.50	204-409	12.165	0.059		
310.00	1.50	204-410	12.205	0.059		
311.00	1.50	204-411	12.244	0.059		
312.00	1.50	204-412	12.283	0.059		
313.00	1.50	204-413	12.323	0.059		
314.00	1.50	204-414	12.362	0.059		
315.00	1.50	204-415	12.402	0.059		
316.00	1.50	204-416	12.441	0.059		
317.00	1.50	204-417	12.480	0.059		
318.00	1.50	204-418	12.520	0.059		
319.00	1.50	204-419	12.559	0.059		
320.00	1.50	204-420	12.598	0.059		
321.00	1.50	204-421	12.638	0.059		
322.00	1.50	204-422	12.677	0.059		
323.00	1.50	204-423	12.717	0.059		
324.00	1.50	204-424	12.756	0.059		
325.00	1.50	204-425	12.795	0.059		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
326.00	1.50	4.00 +/- 0.12	204-426	12.835	0.059	0.157 +/- 0.005
327.00	1.50		204-427	12.874	0.059	
328.00	1.50		204-428	12.913	0.059	
329.00	1.50		204-429	12.953	0.059	
330.00	1.50		204-430	12.992	0.059	
331.00	1.50		204-431	13.031	0.059	
332.00	1.50		204-432	13.071	0.059	
333.00	1.50		204-433	13.110	0.059	
334.00	1.50		204-434	13.150	0.059	
335.00	1.50		204-435	13.189	0.059	
336.00	1.50		204-436	13.228	0.059	
337.00	1.50		204-437	13.268	0.059	
338.00	1.50		204-438	13.307	0.059	
339.00	1.50		204-439	13.346	0.059	
340.00	1.50		204-440	13.386	0.059	
341.00	1.50		204-441	13.425	0.059	
342.00	1.50		204-442	13.465	0.059	
343.00	1.50		204-443	13.504	0.059	
344.00	1.50		204-444	13.543	0.059	
345.00	1.50		204-445	13.583	0.059	
346.00	1.50		204-446	13.622	0.059	
347.00	1.50		204-447	13.661	0.059	
348.00	1.50		204-448	13.701	0.059	
349.00	1.50		204-449	13.740	0.059	
350.00	1.50		204-450	13.780	0.059	
351.00	1.50		204-451	13.819	0.059	
352.00	1.50		204-452	13.858	0.059	
353.00	1.50		204-453	13.898	0.059	
354.00	1.50		204-454	13.937	0.059	
355.00	1.50		204-455	13.976	0.059	
356.00	1.50		204-456	14.016	0.059	
357.00	1.50		204-457	14.055	0.059	
358.00	1.50		204-458	14.094	0.059	
359.00	1.50		204-459	14.134	0.059	
360.00	1.50		204-460	14.173	0.059	
361.00	1.50		204-461	14.213	0.059	
362.00	1.50		204-462	14.252	0.059	
363.00	1.50		204-463	14.291	0.059	
364.00	1.50		204-464	14.331	0.059	
365.00	1.50		204-465	14.370	0.059	
366.00	1.50		204-466	14.409	0.059	
367.00	1.50		204-467	14.449	0.059	
368.00	1.50		204-468	14.488	0.059	
369.00	1.50		204-469	14.528	0.059	
370.00	1.50		204-470	14.567	0.059	
371.00	1.50		204-471	14.606	0.059	
372.00	1.50		204-472	14.646	0.059	
373.00	1.50		204-473	14.685	0.059	
374.00	1.50		204-474	14.724	0.059	
375.00	1.50		204-475	14.764	0.059	
376.00	1.50		204-476	14.803	0.059	
377.00	1.50		204-477	14.843	0.059	
378.00	1.50		204-478	14.882	0.059	
379.00	1.50		204-479	14.921	0.059	
380.00	1.50		204-480	14.961	0.059	
381.00	1.50		204-481	15.000	0.059	
382.00	1.50		204-482	15.039	0.059	
383.00	1.50		204-483	15.079	0.059	
384.00	1.50		204-484	15.118	0.059	
385.00	1.00		204-485	15.157	0.039	
386.00	1.00	204-486	15.197	0.039		
387.00	1.00	204-487	15.236	0.039		
388.00	1.00	204-488	15.276	0.039		
389.00	1.00	204-489	15.315	0.039		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
390.00	1.50	4.00 +/- 0.12	204-490	15.354	0.059	0.157 +/- 0.005
391.00	1.50		204-491	15.394	0.059	
392.00	1.50		204-492	15.433	0.059	
393.00	1.50		204-493	15.472	0.059	
394.00	1.50		204-494	15.512	0.059	
395.00	1.50		204-495	15.551	0.059	
396.00	1.50		204-496	15.591	0.059	
397.00	1.50		204-497	15.630	0.059	
398.00	1.50		204-498	15.669	0.059	
399.00	1.50		204-499	15.709	0.059	
400.00	1.50		204-500	15.748	0.059	
401.00	2.00		204-501	15.787	0.079	
402.00	2.00		204-502	15.827	0.079	
403.00	2.00		204-503	15.866	0.079	
404.00	2.00		204-504	15.906	0.079	
405.00	2.00		204-505	15.945	0.079	
406.00	2.00		204-506	15.984	0.079	
407.00	2.00		204-507	16.024	0.079	
408.00	2.00		204-508	16.063	0.079	
409.00	2.00		204-509	16.102	0.079	
410.00	2.00		204-510	16.142	0.079	
411.00	2.00		204-511	16.181	0.079	
412.00	2.00		204-512	16.220	0.079	
413.00	2.00		204-513	16.260	0.079	
414.00	2.00		204-514	16.299	0.079	
415.00	2.00		204-515	16.339	0.079	
416.00	2.00		204-516	16.378	0.079	
417.00	2.00		204-517	16.417	0.079	
418.00	2.00		204-518	16.457	0.079	
419.00	2.00		204-519	16.496	0.079	
420.00	2.00		204-520	16.535	0.079	
421.00	2.00		204-521	16.575	0.079	
422.00	2.00		204-522	16.614	0.079	
423.00	2.00		204-523	16.654	0.079	
424.00	2.00		204-524	16.693	0.079	
425.00	2.00		204-525	16.732	0.079	
426.00	2.00		204-526	16.772	0.079	
427.00	2.00		204-527	16.811	0.079	
428.00	2.00		204-528	16.850	0.079	
429.00	2.00		204-529	16.890	0.079	
430.00	2.00		204-530	16.929	0.079	
431.00	2.00		204-531	16.969	0.079	
432.00	2.00		204-532	17.008	0.079	
433.00	2.00		204-533	17.047	0.079	
434.00	2.00		204-534	17.087	0.079	
435.00	2.00		204-535	17.126	0.079	
436.00	2.00		204-536	17.165	0.079	
437.00	2.00		204-537	17.205	0.079	
438.00	2.00		204-538	17.244	0.079	
439.00	2.00		204-539	17.283	0.079	
440.00	2.00		204-540	17.323	0.079	
441.00	2.00		204-541	17.362	0.079	
442.00	2.00		204-542	17.402	0.079	
443.00	2.00	204-543	17.441	0.079		
444.00	2.00	204-544	17.480	0.079		
445.00	2.00	204-545	17.520	0.079		
446.00	2.00	204-546	17.559	0.079		
447.00	2.00	204-547	17.598	0.079		
448.00	2.00	204-548	17.638	0.079		
449.00	2.00	204-549	17.677	0.079		
450.00	2.00	204-550	17.717	0.079		
451.00	2.00	204-551	17.756	0.079		
452.00	2.00	204-552	17.795	0.079		
453.00	2.00	204-553	17.835	0.079		

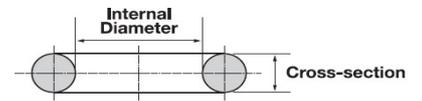


Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
454.00	2.00	4.00 +/- 0.12	204-554	17.874	0.079	0.157 +/- 0.005
455.00	2.00		204-555	17.913	0.079	
456.00	2.00		204-556	17.953	0.079	
457.00	2.00		204-557	17.992	0.079	
458.00	2.00		204-558	18.031	0.079	
459.00	2.00		204-559	18.071	0.079	
460.00	2.00		204-560	18.110	0.079	
461.00	2.00		204-561	18.150	0.079	
462.00	2.00		204-562	18.189	0.079	
463.00	2.00		204-563	18.228	0.079	
464.00	2.00		204-564	18.268	0.079	
465.00	2.00		204-565	18.307	0.079	
466.00	2.00		204-566	18.346	0.079	
467.00	2.00		204-567	18.386	0.079	
468.00	2.00		204-568	18.425	0.079	
469.00	2.00		204-569	18.465	0.079	
470.00	2.00		204-570	18.504	0.079	
471.00	2.00		204-571	18.543	0.079	
472.00	2.00		204-572	18.583	0.079	
473.00	2.00		204-573	18.622	0.079	
474.00	2.00		204-574	18.661	0.079	
475.00	2.00		204-575	18.701	0.079	
476.00	2.00		204-576	18.740	0.079	
477.00	2.00		204-577	18.780	0.079	
478.00	2.00		204-578	18.819	0.079	
479.00	2.00		204-579	18.858	0.079	
480.00	2.00		204-580	18.898	0.079	
481.00	2.00		204-581	18.937	0.079	
482.00	2.00		204-582	18.976	0.079	
483.00	2.00		204-583	19.016	0.079	
484.00	2.00		204-584	19.055	0.079	
485.00	2.00		204-585	19.094	0.079	
486.00	2.00		204-586	19.134	0.079	
487.00	2.00		204-587	19.173	0.079	
488.00	2.00		204-588	19.213	0.079	
489.00	2.00		204-589	19.252	0.079	
490.00	2.00		204-590	19.291	0.079	
491.00	2.00		204-591	19.331	0.079	
492.00	2.00		204-592	19.370	0.079	
493.00	2.00		204-593	19.409	0.079	
494.00	2.00		204-594	19.449	0.079	
495.00	2.00		204-595	19.488	0.079	
496.00	2.00		204-596	19.528	0.079	
497.00	2.00		204-597	19.567	0.079	
498.00	2.00		204-598	19.606	0.079	
499.00	2.00		204-599	19.646	0.079	
500.00	2.00		204-600	19.685	0.079	
4.00	0.15		5.00 +/- 0.12	204-604	0.157	
5.00	0.15	204-605		0.197	0.006	
6.00	0.15	204-606		0.236	0.006	
7.00	0.15	204-607		0.276	0.006	
8.00	0.15	204-608		0.315	0.006	
9.00	0.15	204-609		0.354	0.006	
10.00	0.15	204-610		0.394	0.006	
11.00	0.20	204-611		0.433	0.008	
12.00	0.20	204-612		0.472	0.008	
13.00	0.20	204-613		0.512	0.008	
14.00	0.20	204-614		0.551	0.008	
15.00	0.20	204-615		0.591	0.008	
16.00	0.20	204-616		0.630	0.008	
17.00	0.20	204-617		0.669	0.008	
18.00	0.20	204-618		0.709	0.008	
19.00	0.25	204-619		0.748	0.010	
20.00	0.25	204-620		0.787	0.010	




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
21.00	0.25	5.00 +/- 0.12	204-621	0.827	0.010	0.197 +/- 0.005
22.00	0.25		204-622	0.866	0.010	
23.00	0.25		204-623	0.906	0.010	
24.00	0.25		204-624	0.945	0.010	
25.00	0.25		204-625	0.984	0.010	
26.00	0.25		204-626	1.024	0.010	
27.00	0.25		204-627	1.063	0.010	
28.00	0.25		204-628	1.102	0.010	
29.00	0.25		204-629	1.142	0.010	
30.00	0.25		204-630	1.181	0.010	
31.00	0.30		204-631	1.220	0.012	
32.00	0.30		204-632	1.260	0.012	
33.00	0.30		204-633	1.299	0.012	
34.00	0.30		204-634	1.339	0.012	
35.00	0.30		204-635	1.378	0.012	
36.00	0.30		204-636	1.417	0.012	
37.00	0.30		204-637	1.457	0.012	
38.00	0.30		204-638	1.496	0.012	
39.00	0.30		204-639	1.535	0.012	
40.00	0.30		204-640	1.575	0.012	
41.00	0.30		204-641	1.614	0.012	
42.00	0.30		204-642	1.654	0.012	
43.00	0.30		204-643	1.693	0.012	
44.00	0.30		204-644	1.732	0.012	
45.00	0.30		204-645	1.772	0.012	
46.00	0.30		204-646	1.811	0.012	
47.00	0.30		204-647	1.850	0.012	
48.00	0.30		204-648	1.890	0.012	
49.00	0.30		204-649	1.929	0.012	
50.00	0.30		204-650	1.969	0.012	
51.00	0.40		204-651	2.008	0.016	
52.00	0.40		204-652	2.047	0.016	
53.00	0.40		204-653	2.087	0.016	
54.00	0.40		204-654	2.126	0.016	
55.00	0.40		204-655	2.165	0.016	
56.00	0.40		204-656	2.205	0.016	
57.00	0.40		204-657	2.244	0.016	
58.00	0.40		204-658	2.283	0.016	
59.00	0.40		204-659	2.323	0.016	
60.00	0.40		204-660	2.362	0.016	
61.00	0.40		204-661	2.402	0.016	
62.00	0.40		204-662	2.441	0.016	
63.00	0.40		204-663	2.480	0.016	
64.00	0.40		204-664	2.520	0.016	
65.00	0.40		204-665	2.559	0.016	
66.00	0.40		204-666	2.598	0.016	
67.00	0.40		204-667	2.638	0.016	
68.00	0.40		204-668	2.677	0.016	
69.00	0.40		204-669	2.717	0.016	
70.00	0.40		204-670	2.756	0.016	
71.00	0.40		204-671	2.795	0.016	
72.00	0.40		204-672	2.835	0.016	
73.00	0.40		204-673	2.874	0.016	
74.00	0.40		204-674	2.913	0.016	
75.00	0.40		204-675	2.953	0.016	
76.00	0.40		204-676	2.992	0.016	
77.00	0.40		204-677	3.031	0.016	
78.00	0.40		204-678	3.071	0.016	
79.00	0.40		204-679	3.110	0.016	
80.00	0.40		204-680	3.150	0.016	
81.00	0.50	204-681	3.189	0.020		
82.00	0.50	204-682	3.228	0.020		
83.00	0.50	204-683	3.268	0.020		
84.00	0.50	204-684	3.307	0.020		

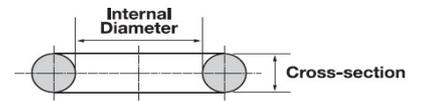


Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
85.00	0.50	5.00 +/- 0.12	204-685	3.346	0.020	0.197 +/- 0.005
86.00	0.50		204-686	3.386	0.020	
87.00	0.50		204-687	3.425	0.020	
88.00	0.50		204-688	3.465	0.020	
89.00	0.50		204-689	3.504	0.020	
90.00	0.50		204-690	3.543	0.020	
91.00	0.50		204-691	3.583	0.020	
92.00	0.50		204-692	3.622	0.020	
93.00	0.50		204-693	3.661	0.020	
94.00	0.50		204-694	3.701	0.020	
95.00	0.50		204-695	3.740	0.020	
96.00	0.50		204-696	3.780	0.020	
97.00	0.50		204-697	3.819	0.020	
98.00	0.50		204-698	3.858	0.020	
99.00	0.50		204-699	3.898	0.020	
100.00	0.50		204-700	3.937	0.020	
101.00	0.50		204-701	3.976	0.020	
102.00	0.50		204-702	4.016	0.020	
103.00	0.50		204-703	4.055	0.020	
104.00	0.50		204-704	4.094	0.020	
105.00	0.50		204-705	4.134	0.020	
106.00	0.50		204-706	4.173	0.020	
107.00	0.50		204-707	4.213	0.020	
108.00	0.50		204-708	4.252	0.020	
109.00	0.50		204-709	4.291	0.020	
110.00	0.50		204-710	4.331	0.020	
111.00	0.50		204-711	4.370	0.020	
112.00	0.50		204-712	4.409	0.020	
113.00	0.50		204-713	4.449	0.020	
114.00	0.50		204-714	4.488	0.020	
115.00	0.50		204-715	4.528	0.020	
116.00	0.50		204-716	4.567	0.020	
117.00	0.50		204-717	4.606	0.020	
118.00	0.50		204-718	4.646	0.020	
119.00	0.50		204-719	4.685	0.020	
120.00	0.50		204-720	4.724	0.020	
121.00	0.60		204-721	4.764	0.024	
122.00	0.60		204-722	4.803	0.024	
123.00	0.60		204-723	4.843	0.024	
124.00	0.60		204-724	4.882	0.024	
125.00	0.60		204-725	4.921	0.024	
126.00	0.60		204-726	4.961	0.024	
127.00	0.60		204-727	5.000	0.024	
128.00	0.60		204-728	5.039	0.024	
129.00	0.60		204-729	5.079	0.024	
130.00	0.60		204-730	5.118	0.024	
131.00	0.60		204-731	5.157	0.024	
132.00	0.60		204-732	5.197	0.024	
133.00	0.60	204-733	5.236	0.024		
134.00	0.60	204-734	5.276	0.024		
135.00	0.60	204-735	5.315	0.024		
136.00	0.60	204-736	5.354	0.024		
137.00	0.60	204-737	5.394	0.024		
138.00	0.60	204-738	5.433	0.024		
139.00	0.60	204-739	5.472	0.024		
140.00	0.60	204-740	5.512	0.024		
141.00	0.60	204-741	5.551	0.024		
142.00	0.60	204-742	5.591	0.024		
143.00	0.60	204-743	5.630	0.024		
144.00	0.60	204-744	5.669	0.024		
145.00	0.60	204-745	5.709	0.024		
146.00	0.60	204-746	5.748	0.024		
147.00	0.60	204-747	5.787	0.024		
148.00	0.60	204-748	5.827	0.024		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
149.00	0.60	5.00 +/- 0.12	204-749	5.866	0.024	0.197 +/- 0.005
150.00	0.60		204-750	5.906	0.024	
151.00	0.60		204-751	5.945	0.024	
152.00	0.60		204-752	5.984	0.024	
153.00	0.60		204-753	6.024	0.024	
154.00	0.60		204-754	6.063	0.024	
155.00	0.60		204-755	6.102	0.024	
156.00	0.60		204-756	6.142	0.024	
157.00	0.60		204-757	6.181	0.024	
158.00	0.60		204-758	6.220	0.024	
159.00	0.60		204-759	6.260	0.024	
160.00	0.60		204-760	6.299	0.024	
161.00	0.60		204-761	6.339	0.024	
162.00	0.60		204-762	6.378	0.024	
163.00	0.60		204-763	6.417	0.024	
164.00	0.60		204-764	6.457	0.024	
165.00	0.60		204-765	6.496	0.024	
166.00	0.60		204-766	6.535	0.024	
167.00	0.60		204-767	6.575	0.024	
168.00	0.60		204-768	6.614	0.024	
169.00	0.60		204-769	6.654	0.024	
170.00	0.60		204-770	6.693	0.024	
171.00	0.60		204-771	6.732	0.024	
172.00	0.60		204-772	6.772	0.024	
173.00	0.60		204-773	6.811	0.024	
174.00	0.60		204-774	6.850	0.024	
175.00	0.60		204-775	6.890	0.024	
176.00	0.60		204-776	6.929	0.024	
177.00	0.60		204-777	6.969	0.024	
178.00	0.60		204-778	7.008	0.024	
179.00	0.60		204-779	7.047	0.024	
180.00	0.60		204-780	7.087	0.024	
181.00	0.80		204-781	7.126	0.031	
182.00	0.80		204-782	7.165	0.031	
183.00	0.80		204-783	7.205	0.031	
184.00	0.80		204-784	7.244	0.031	
185.00	0.80		204-785	7.283	0.031	
186.00	0.80		204-786	7.323	0.031	
187.00	0.80		204-787	7.362	0.031	
188.00	0.80		204-788	7.402	0.031	
189.00	0.80		204-789	7.441	0.031	
190.00	0.80		204-790	7.480	0.031	
191.00	0.80		204-791	7.520	0.031	
192.00	0.80		204-792	7.559	0.031	
193.00	0.80		204-793	7.598	0.031	
194.00	0.80		204-794	7.638	0.031	
195.00	0.80		204-795	7.677	0.031	
196.00	0.80		204-796	7.717	0.031	
197.00	0.80	204-797	7.756	0.031		
198.00	0.80	204-798	7.795	0.031		
199.00	0.80	204-799	7.835	0.031		
200.00	0.80	204-800	7.874	0.031		
201.00	0.80	204-801	7.913	0.031		
202.00	0.80	204-802	7.953	0.031		
203.00	0.80	204-803	7.992	0.031		
204.00	0.80	204-804	8.031	0.031		
205.00	0.80	204-805	8.071	0.031		
206.00	0.80	204-806	8.110	0.031		
207.00	0.80	204-807	8.150	0.031		
208.00	0.80	204-808	8.189	0.031		
209.00	0.80	204-809	8.228	0.031		
210.00	0.80	204-810	8.268	0.031		
211.00	0.80	204-811	8.307	0.031		
212.00	0.80	204-812	8.346	0.031		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
213.00	0.80	5.00 +/- 0.12	204-813	8.386	0.031	0.197 +/- 0.005
214.00	0.80		204-814	8.425	0.031	
215.00	0.80		204-815	8.465	0.031	
216.00	0.80		204-816	8.504	0.031	
217.00	0.80		204-817	8.543	0.031	
218.00	0.80		204-818	8.583	0.031	
219.00	0.80		204-819	8.622	0.031	
220.00	0.80		204-820	8.661	0.031	
221.00	0.80		204-821	8.701	0.031	
222.00	0.80		204-822	8.740	0.031	
223.00	0.80		204-823	8.780	0.031	
224.00	0.80		204-824	8.819	0.031	
225.00	0.80		204-825	8.858	0.031	
226.00	0.80		204-826	8.898	0.031	
227.00	0.80		204-827	8.937	0.031	
228.00	0.80		204-828	8.976	0.031	
229.00	0.80		204-829	9.016	0.031	
230.00	0.80		204-830	9.055	0.031	
231.00	0.80		204-831	9.094	0.031	
232.00	0.80		204-832	9.134	0.031	
233.00	0.80		204-833	9.173	0.031	
234.00	0.80		204-834	9.213	0.031	
235.00	0.80		204-835	9.252	0.031	
236.00	0.80		204-836	9.291	0.031	
237.00	0.80		204-837	9.331	0.031	
238.00	0.80		204-838	9.370	0.031	
239.00	0.80		204-839	9.409	0.031	
240.00	0.80		204-840	9.449	0.031	
241.00	0.80		204-841	9.488	0.031	
242.00	0.80		204-842	9.528	0.031	
243.00	0.80		204-843	9.567	0.031	
244.00	0.80		204-844	9.606	0.031	
245.00	0.80		204-845	9.646	0.031	
246.00	0.80		204-846	9.685	0.031	
247.00	0.80		204-847	9.724	0.031	
248.00	0.80		204-848	9.764	0.031	
249.00	0.80		204-849	9.803	0.031	
250.00	0.80		204-850	9.843	0.031	
251.00	1.00		204-851	9.882	0.039	
252.00	1.00		204-852	9.921	0.039	
253.00	1.00		204-853	9.961	0.039	
254.00	1.00		204-854	10.000	0.039	
255.00	1.00		204-855	10.039	0.039	
256.00	1.00		204-856	10.079	0.039	
257.00	1.00		204-857	10.118	0.039	
258.00	1.00		204-858	10.157	0.039	
259.00	1.00		204-859	10.197	0.039	
260.00	1.00		204-860	10.236	0.039	
261.00	1.00		204-861	10.276	0.039	
262.00	1.00		204-862	10.315	0.039	
263.00	1.00		204-863	10.354	0.039	
264.00	1.00		204-864	10.394	0.039	
265.00	1.00		204-865	10.433	0.039	
266.00	1.00		204-866	10.472	0.039	
267.00	1.00		204-867	10.512	0.039	
268.00	1.00		204-868	10.551	0.039	
269.00	1.00	204-869	10.591	0.039		
270.00	1.00	204-870	10.630	0.039		
271.00	1.00	204-871	10.669	0.039		
272.00	1.00	204-872	10.709	0.039		
273.00	1.00	204-873	10.748	0.039		
274.00	1.00	204-874	10.787	0.039		
275.00	1.00	204-875	10.827	0.039		
276.00	1.00	204-876	10.866	0.039		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
277.00	1.00	5.00 +/- 0.12	204-877	10.906	0.039	0.197 +/- 0.005
278.00	1.00		204-878	10.945	0.039	
279.00	1.00		204-879	10.984	0.039	
280.00	1.00		204-880	11.024	0.039	
281.00	1.00		204-881	11.063	0.039	
282.00	1.00		204-882	11.102	0.039	
283.00	1.00		204-883	11.142	0.039	
284.00	1.00		204-884	11.181	0.039	
285.00	1.00		204-885	11.220	0.039	
286.00	1.00		204-886	11.260	0.039	
287.00	1.00		204-887	11.299	0.039	
288.00	1.00		204-888	11.339	0.039	
289.00	1.00		204-889	11.378	0.039	
290.00	1.00		204-890	11.417	0.039	
291.00	1.00		204-891	11.457	0.039	
292.00	1.00		204-892	11.496	0.039	
293.00	1.00		204-893	11.535	0.039	
294.00	1.00		204-894	11.575	0.039	
295.00	1.00		204-895	11.614	0.039	
296.00	1.00		204-896	11.654	0.039	
297.00	1.00		204-897	11.693	0.039	
298.00	1.00		204-898	11.732	0.039	
299.00	1.00		204-899	11.772	0.039	
300.00	1.00		204-900	11.811	0.039	
301.00	1.50		204-901	11.850	0.059	
302.00	1.50		204-902	11.890	0.059	
303.00	1.50		204-903	11.929	0.059	
304.00	1.50		204-904	11.969	0.059	
305.00	1.50		204-905	12.008	0.059	
306.00	1.50		204-906	12.047	0.059	
307.00	1.50		204-907	12.087	0.059	
308.00	1.50		204-908	12.126	0.059	
309.00	1.50		204-909	12.165	0.059	
310.00	1.50		204-910	12.205	0.059	
311.00	1.50		204-911	12.244	0.059	
312.00	1.50		204-912	12.283	0.059	
313.00	1.50		204-913	12.323	0.059	
314.00	1.50		204-914	12.362	0.059	
315.00	1.50		204-915	12.402	0.059	
316.00	1.50		204-916	12.441	0.059	
317.00	1.50	204-917	12.480	0.059		
318.00	1.50	204-918	12.520	0.059		
319.00	1.50	204-919	12.559	0.059		
320.00	1.50	204-920	12.598	0.059		
321.00	1.50	204-921	12.638	0.059		
322.00	1.50	204-922	12.677	0.059		
323.00	1.50	204-923	12.717	0.059		
324.00	1.50	204-924	12.756	0.059		
325.00	1.50	204-925	12.795	0.059		
326.00	1.50	204-926	12.835	0.059		
327.00	1.50	204-927	12.874	0.059		
328.00	1.50	204-928	12.913	0.059		
329.00	1.50	204-929	12.953	0.059		
330.00	1.50	204-930	12.992	0.059		
331.00	1.50	204-931	13.031	0.059		
332.00	1.50	204-932	13.071	0.059		
333.00	1.50	204-933	13.110	0.059		
334.00	1.50	204-934	13.150	0.059		
335.00	1.50	204-935	13.189	0.059		
336.00	1.50	204-936	13.228	0.059		
337.00	1.50	204-937	13.268	0.059		
338.00	1.50	204-938	13.307	0.059		
339.00	1.50	204-939	13.346	0.059		
340.00	1.50	204-940	13.386	0.059		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
341.00	1.50	5.00 +/- 0.12	204-941	13.425	0.059	0.197 +/- 0.005
342.00	1.50		204-942	13.465	0.059	
343.00	1.50		204-943	13.504	0.059	
344.00	1.50		204-944	13.543	0.059	
345.00	1.50		204-945	13.583	0.059	
346.00	1.50		204-946	13.622	0.059	
347.00	1.50		204-947	13.661	0.059	
348.00	1.50		204-948	13.701	0.059	
349.00	1.50		204-949	13.740	0.059	
350.00	1.50		204-950	13.780	0.059	
351.00	1.50		204-951	13.819	0.059	
352.00	1.50		204-952	13.858	0.059	
353.00	1.50		204-953	13.898	0.059	
354.00	1.50		204-954	13.937	0.059	
355.00	1.50		204-955	13.976	0.059	
356.00	1.50		204-956	14.016	0.059	
357.00	1.50		204-957	14.055	0.059	
358.00	1.50		204-958	14.094	0.059	
359.00	1.50		204-959	14.134	0.059	
360.00	1.50		204-960	14.173	0.059	
361.00	1.50		204-961	14.213	0.059	
362.00	1.50		204-962	14.252	0.059	
363.00	1.50		204-963	14.291	0.059	
364.00	1.50		204-964	14.331	0.059	
365.00	1.50		204-965	14.370	0.059	
366.00	1.50		204-966	14.409	0.059	
367.00	1.50		204-967	14.449	0.059	
368.00	1.50		204-968	14.488	0.059	
369.00	1.50		204-969	14.528	0.059	
370.00	1.50		204-970	14.567	0.059	
371.00	1.50		204-971	14.606	0.059	
372.00	1.50		204-972	14.646	0.059	
373.00	1.50		204-973	14.685	0.059	
374.00	1.50		204-974	14.724	0.059	
375.00	1.50		204-975	14.764	0.059	
376.00	1.50		204-976	14.803	0.059	
377.00	1.50		204-977	14.843	0.059	
378.00	1.50		204-978	14.882	0.059	
379.00	1.50		204-979	14.921	0.059	
380.00	1.50	204-980	14.961	0.059		
381.00	1.50	204-981	15.000	0.059		
382.00	1.50	204-982	15.039	0.059		
383.00	1.50	204-983	15.079	0.059		
384.00	1.50	204-984	15.118	0.059		
385.00	1.50	204-985	15.157	0.059		
386.00	1.50	204-986	15.197	0.059		
387.00	1.50	204-987	15.236	0.059		
388.00	1.50	204-988	15.276	0.059		
389.00	1.50	204-989	15.315	0.059		
390.00	1.50	204-990	15.354	0.059		
391.00	1.50	204-991	15.394	0.059		
392.00	1.50	204-992	15.433	0.059		
393.00	1.50	204-993	15.472	0.059		
394.00	1.50	204-994	15.512	0.059		
395.00	1.50	204-995	15.551	0.059		
396.00	1.50	204-996	15.591	0.059		
397.00	1.50	204-997	15.630	0.059		
398.00	1.50	204-998	15.669	0.059		
399.00	1.50	204-999	15.709	0.059		
3.00	0.15	1.50 +/- 0.08	206-003	0.118	0.006	0.059 +/- 0.003
4.00	0.15		206-004	0.157	0.006	
5.00	0.15		206-005	0.197	0.006	
6.00	0.15		206-006	0.236	0.006	
7.00	0.15		206-007	0.276	0.006	




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
8.00	0.15	1.50 +/- 0.08	206-008	0.315	0.006	0.059 +/- 0.003
9.00	0.15		206-009	0.354	0.006	
10.00	0.20		206-010	0.394	0.008	
11.00	0.20		206-011	0.433	0.008	
12.00	0.20		206-012	0.472	0.008	
13.00	0.20		206-013	0.512	0.008	
14.00	0.20		206-014	0.551	0.008	
15.00	0.20		206-015	0.591	0.008	
16.00	0.20		206-016	0.630	0.008	
17.00	0.20		206-017	0.669	0.008	
18.00	0.20		206-018	0.709	0.008	
19.00	0.25		206-019	0.748	0.010	
20.00	0.25		206-020	0.787	0.010	
21.00	0.25		206-021	0.827	0.010	
22.00	0.25		206-022	0.866	0.010	
23.00	0.25		206-023	0.906	0.010	
24.00	0.25		206-024	0.945	0.010	
25.00	0.25		206-025	0.984	0.010	
26.00	0.25		206-026	1.024	0.010	
27.00	0.25		206-027	1.063	0.010	
28.00	0.25		206-028	1.102	0.010	
29.00	0.25		206-029	1.142	0.010	
30.00	0.25		206-030	1.181	0.010	
31.00	0.30		206-031	1.220	0.012	
32.00	0.30		206-032	1.260	0.012	
33.00	0.30		206-033	1.299	0.012	
34.00	0.30		206-034	1.339	0.012	
35.00	0.30		206-035	1.378	0.012	
36.00	0.30		206-036	1.417	0.012	
37.00	0.30		206-037	1.457	0.012	
38.00	0.30		206-038	1.496	0.012	
39.00	0.30		206-039	1.535	0.012	
40.00	0.30		206-040	1.575	0.012	
41.00	0.30		206-041	1.614	0.012	
42.00	0.30		206-042	1.654	0.012	
43.00	0.30		206-043	1.693	0.012	
44.00	0.30		206-044	1.732	0.012	
45.00	0.30		206-045	1.772	0.012	
46.00	0.30		206-046	1.811	0.012	
47.00	0.30		206-047	1.850	0.012	
48.00	0.30		206-048	1.890	0.012	
49.00	0.30		206-049	1.929	0.012	
50.00	0.30		206-050	1.969	0.012	
51.00	0.40		206-051	2.008	0.016	
52.00	0.40		206-052	2.047	0.016	
53.00	0.40		206-053	2.087	0.016	
54.00	0.40		206-054	2.126	0.016	
55.00	0.40		206-055	2.165	0.016	
56.00	0.40		206-056	2.205	0.016	
57.00	0.40		206-057	2.244	0.016	
58.00	0.40		206-058	2.283	0.016	
59.00	0.40		206-059	2.323	0.016	
60.00	0.40		206-060	2.362	0.016	
61.00	0.40		206-061	2.402	0.016	
62.00	0.40		206-062	2.441	0.016	
63.00	0.40		206-063	2.480	0.016	
64.00	0.40		206-064	2.520	0.016	
65.00	0.40		206-065	2.559	0.016	
66.00	0.40		206-066	2.598	0.016	
67.00	0.40		206-067	2.638	0.016	
68.00	0.40		206-068	2.677	0.016	
69.00	0.40		206-069	2.717	0.016	
70.00	0.40		206-070	2.756	0.016	
71.00	0.40		206-071	2.795	0.016	

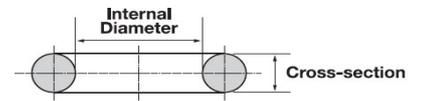


Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
72.00	0.40	1.50 +/- 0.08	206-072	2.835	0.016	0.059 +/- 0.003
73.00	0.40		206-073	2.874	0.016	
74.00	0.40		206-074	2.913	0.016	
75.00	0.40		206-075	2.953	0.016	
76.00	0.40		206-076	2.992	0.016	
77.00	0.40		206-077	3.031	0.016	
78.00	0.40		206-078	3.071	0.016	
79.00	0.40		206-079	3.110	0.016	
80.00	0.40		206-080	3.150	0.016	
81.00	0.50		206-081	3.189	0.020	
82.00	0.50		206-082	3.228	0.020	
83.00	0.50		206-083	3.268	0.020	
84.00	0.50		206-084	3.307	0.020	
85.00	0.50		206-085	3.346	0.020	
86.00	0.50		206-086	3.386	0.020	
87.00	0.50		206-087	3.425	0.020	
88.00	0.50		206-088	3.465	0.020	
89.00	0.50		206-089	3.504	0.020	
90.00	0.50		206-090	3.543	0.020	
91.00	0.50		206-091	3.583	0.020	
92.00	0.50		206-092	3.622	0.020	
93.00	0.50		206-093	3.661	0.020	
94.00	0.50		206-094	3.701	0.020	
95.00	0.50		206-095	3.740	0.020	
96.00	0.50		206-096	3.780	0.020	
97.00	0.50		206-097	3.819	0.020	
98.00	0.50		206-098	3.858	0.020	
99.00	0.50		206-099	3.898	0.020	
100.00	0.50		206-100	3.937	0.020	
4.00	0.15		2.50 +/- 0.08	206-104	0.157	
5.00	0.15	206-105		0.197	0.006	
6.00	0.15	206-106		0.236	0.006	
7.00	0.15	206-107		0.276	0.006	
8.00	0.15	206-108		0.315	0.006	
9.00	0.15	206-109		0.354	0.006	
10.00	0.20	206-110		0.394	0.008	
11.00	0.20	206-111		0.433	0.008	
12.00	0.20	206-112		0.472	0.008	
13.00	0.20	206-113		0.512	0.008	
14.00	0.20	206-114		0.551	0.008	
15.00	0.20	206-115		0.591	0.008	
16.00	0.20	206-116		0.630	0.008	
17.00	0.20	206-117		0.669	0.008	
18.00	0.20	206-118		0.709	0.008	
19.00	0.25	206-119		0.748	0.010	
20.00	0.25	206-120		0.787	0.010	
21.00	0.25	206-121		0.827	0.010	
22.00	0.25	206-122		0.866	0.010	
23.00	0.25	206-123		0.906	0.010	
24.00	0.25	206-124		0.945	0.010	
25.00	0.25	206-125		0.984	0.010	
26.00	0.25	206-126		1.024	0.010	
27.00	0.25	206-127		1.063	0.010	
28.00	0.25	206-128		1.102	0.010	
29.00	0.25	206-129		1.142	0.010	
30.00	0.25	206-130		1.181	0.010	
31.00	0.30	206-131		1.220	0.012	
32.00	0.30	206-132		1.260	0.012	
33.00	0.30	206-133		1.299	0.012	
34.00	0.30	206-134	1.339	0.012		
35.00	0.30	206-135	1.378	0.012		
36.00	0.30	206-136	1.417	0.012		
37.00	0.30	206-137	1.457	0.012		
38.00	0.30	206-138	1.496	0.012		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
39.00	0.30	2.50 +/- 0.08	206-139	1.535	0.012	0.098 +/- 0.003
40.00	0.30		206-140	1.575	0.012	
41.00	0.30		206-141	1.614	0.012	
42.00	0.30		206-142	1.654	0.012	
43.00	0.30		206-143	1.693	0.012	
44.00	0.30		206-144	1.732	0.012	
45.00	0.30		206-145	1.772	0.012	
46.00	0.30		206-146	1.811	0.012	
47.00	0.30		206-147	1.850	0.012	
48.00	0.30		206-148	1.890	0.012	
49.00	0.30		206-149	1.929	0.012	
50.00	0.30		206-150	1.969	0.012	
51.00	0.40		206-151	2.008	0.016	
52.00	0.40		206-152	2.047	0.016	
53.00	0.40		206-153	2.087	0.016	
54.00	0.40		206-154	2.126	0.016	
55.00	0.40		206-155	2.165	0.016	
56.00	0.40		206-156	2.205	0.016	
57.00	0.40		206-157	2.244	0.016	
58.00	0.40		206-158	2.283	0.016	
59.00	0.40		206-159	2.323	0.016	
60.00	0.40		206-160	2.362	0.016	
61.00	0.40		206-161	2.402	0.016	
62.00	0.40		206-162	2.441	0.016	
63.00	0.40		206-163	2.480	0.016	
64.00	0.40		206-164	2.520	0.016	
65.00	0.40		206-165	2.559	0.016	
66.00	0.40		206-166	2.598	0.016	
67.00	0.40		206-167	2.638	0.016	
68.00	0.40		206-168	2.677	0.016	
69.00	0.40		206-169	2.717	0.016	
70.00	0.40		206-170	2.756	0.016	
71.00	0.40		206-171	2.795	0.016	
72.00	0.40		206-172	2.835	0.016	
73.00	0.40		206-173	2.874	0.016	
74.00	0.40		206-174	2.913	0.016	
75.00	0.40		206-175	2.953	0.016	
76.00	0.40		206-176	2.992	0.016	
77.00	0.40		206-177	3.031	0.016	
78.00	0.40		206-178	3.071	0.016	
79.00	0.40		206-179	3.110	0.016	
80.00	0.40		206-180	3.150	0.016	
81.00	0.50		206-181	3.189	0.020	
82.00	0.50		206-182	3.228	0.020	
83.00	0.50		206-183	3.268	0.020	
84.00	0.50		206-184	3.307	0.020	
85.00	0.50		206-185	3.346	0.020	
86.00	0.50		206-186	3.386	0.020	
87.00	0.50		206-187	3.425	0.020	
88.00	0.50		206-188	3.465	0.020	
89.00	0.50		206-189	3.504	0.020	
90.00	0.50		206-190	3.543	0.020	
91.00	0.50		206-191	3.583	0.020	
92.00	0.50		206-192	3.622	0.020	
93.00	0.50		206-193	3.661	0.020	
94.00	0.50		206-194	3.701	0.020	
95.00	0.50		206-195	3.740	0.020	
96.00	0.50		206-196	3.780	0.020	
97.00	0.50		206-197	3.819	0.020	
98.00	0.50		206-198	3.858	0.020	
99.00	0.50		206-199	3.898	0.020	
100.00	0.50		206-200	3.937	0.020	
101.00	0.50		206-201	3.976	0.020	
102.00	0.50		206-202	4.016	0.020	

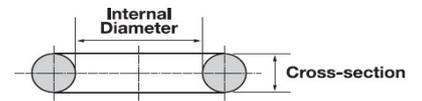


Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
103.00	0.50	2.50 +/- 0.08	206-203	4.055	0.020	0.098 +/- 0.003
104.00	0.50		206-204	4.094	0.020	
105.00	0.50		206-205	4.134	0.020	
106.00	0.50		206-206	4.173	0.020	
107.00	0.50		206-207	4.213	0.020	
108.00	0.50		206-208	4.252	0.020	
109.00	0.50		206-209	4.291	0.020	
110.00	0.50		206-210	4.331	0.020	
111.00	0.50		206-211	4.370	0.020	
112.00	0.50		206-212	4.409	0.020	
113.00	0.50		206-213	4.449	0.020	
114.00	0.50		206-214	4.488	0.020	
115.00	0.50		206-215	4.528	0.020	
116.00	0.50		206-216	4.567	0.020	
117.00	0.50		206-217	4.606	0.020	
118.00	0.50		206-218	4.646	0.020	
119.00	0.50		206-219	4.685	0.020	
120.00	0.50		206-220	4.724	0.020	
121.00	0.60		206-221	4.764	0.024	
122.00	0.60		206-222	4.803	0.024	
123.00	0.60		206-223	4.843	0.024	
124.00	0.60		206-224	4.882	0.024	
125.00	0.60		206-225	4.921	0.024	
126.00	0.60		206-226	4.961	0.024	
127.00	0.60		206-227	5.000	0.024	
128.00	0.60		206-228	5.039	0.024	
129.00	0.60		206-229	5.079	0.024	
130.00	0.60		206-230	5.118	0.024	
131.00	0.60		206-231	5.157	0.024	
132.00	0.60		206-232	5.197	0.024	
133.00	0.60		206-233	5.236	0.024	
134.00	0.60		206-234	5.276	0.024	
135.00	0.60		206-235	5.315	0.024	
136.00	0.60		206-236	5.354	0.024	
137.00	0.60		206-237	5.394	0.024	
138.00	0.60	206-238	5.433	0.024		
139.00	0.60	206-239	5.472	0.024		
140.00	0.60	206-240	5.512	0.024		
141.00	0.60	206-241	5.551	0.024		
142.00	0.60	206-242	5.591	0.024		
143.00	0.60	206-243	5.630	0.024		
144.00	0.60	206-244	5.669	0.024		
145.00	0.60	206-245	5.709	0.024		
146.00	0.60	206-246	5.748	0.024		
147.00	0.60	206-247	5.787	0.024		
148.00	0.60	206-248	5.827	0.024		
149.00	0.60	206-249	5.866	0.024		
150.00	0.60	206-250	5.906	0.024		
3.00	0.15	3.00 +/- 0.10	206-303	0.118	0.006	0.118 +/- 0.004
4.00	0.15		206-304	0.157	0.006	
5.00	0.15		206-305	0.197	0.006	
6.00	0.15		206-306	0.236	0.006	
7.00	0.15		206-307	0.276	0.006	
8.00	0.15		206-308	0.315	0.006	
9.00	0.15		206-309	0.354	0.006	
10.00	0.20		206-310	0.394	0.008	
11.00	0.20		206-311	0.433	0.008	
12.00	0.20		206-312	0.472	0.008	
13.00	0.20		206-313	0.512	0.008	
14.00	0.20		206-314	0.551	0.008	
15.00	0.20		206-315	0.591	0.008	
16.00	0.20		206-316	0.630	0.008	
17.00	0.20		206-317	0.669	0.008	
18.00	0.20		206-318	0.709	0.008	




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
19.00	0.25	3.00 +/- 0.10	206-319	0.748	0.010	0.118 +/- 0.004
20.00	0.25		206-320	0.787	0.010	
21.00	0.25		206-321	0.827	0.010	
22.00	0.25		206-322	0.866	0.010	
23.00	0.25		206-323	0.906	0.010	
24.00	0.25		206-324	0.945	0.010	
25.00	0.25		206-325	0.984	0.010	
26.00	0.25		206-326	1.024	0.010	
27.00	0.25		206-327	1.063	0.010	
28.00	0.25		206-328	1.102	0.010	
29.00	0.25		206-329	1.142	0.010	
30.00	0.25		206-330	1.181	0.010	
31.00	0.30		206-331	1.220	0.012	
32.00	0.30		206-332	1.260	0.012	
33.00	0.30		206-333	1.299	0.012	
34.00	0.30		206-334	1.339	0.012	
35.00	0.30		206-335	1.378	0.012	
36.00	0.30		206-336	1.417	0.012	
37.00	0.30		206-337	1.457	0.012	
38.00	0.30		206-338	1.496	0.012	
39.00	0.30		206-339	1.535	0.012	
40.00	0.30		206-340	1.575	0.012	
41.00	0.30		206-341	1.614	0.012	
42.00	0.30		206-342	1.654	0.012	
43.00	0.30		206-343	1.693	0.012	
44.00	0.30		206-344	1.732	0.012	
45.00	0.30		206-345	1.772	0.012	
46.00	0.30		206-346	1.811	0.012	
47.00	0.30		206-347	1.850	0.012	
48.00	0.30		206-348	1.890	0.012	
49.00	0.30		206-349	1.929	0.012	
50.00	0.30		206-350	1.969	0.012	
51.00	0.40		206-351	2.008	0.016	
52.00	0.40		206-352	2.047	0.016	
53.00	0.40		206-353	2.087	0.016	
54.00	0.40		206-354	2.126	0.016	
55.00	0.40		206-355	2.165	0.016	
56.00	0.40		206-356	2.205	0.016	
57.00	0.40		206-357	2.244	0.016	
58.00	0.40		206-358	2.283	0.016	
59.00	0.40		206-359	2.323	0.016	
60.00	0.40		206-360	2.362	0.016	
61.00	0.40		206-361	2.402	0.016	
62.00	0.40		206-362	2.441	0.016	
63.00	0.40		206-363	2.480	0.016	
64.00	0.40		206-364	2.520	0.016	
65.00	0.40		206-365	2.559	0.016	
66.00	0.40		206-366	2.598	0.016	
67.00	0.40		206-367	2.638	0.016	
68.00	0.40		206-368	2.677	0.016	
69.00	0.40		206-369	2.717	0.016	
70.00	0.40		206-370	2.756	0.016	
71.00	0.40		206-371	2.795	0.016	
72.00	0.40		206-372	2.835	0.016	
73.00	0.40		206-373	2.874	0.016	
74.00	0.40		206-374	2.913	0.016	
75.00	0.40		206-375	2.953	0.016	
76.00	0.40		206-376	2.992	0.016	
77.00	0.40		206-377	3.031	0.016	
78.00	0.40		206-378	3.071	0.016	
79.00	0.40		206-379	3.110	0.016	
80.00	0.40		206-380	3.150	0.016	
81.00	0.50		206-381	3.189	0.020	
82.00	0.50		206-382	3.228	0.020	




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
83.00	0.50	3.00 +/- 0.10	206-383	3.268	0.020	0.118 +/- 0.004
84.00	0.50		206-384	3.307	0.020	
85.00	0.50		206-385	3.346	0.020	
86.00	0.50		206-386	3.386	0.020	
87.00	0.50		206-387	3.425	0.020	
88.00	0.50		206-388	3.465	0.020	
89.00	0.50		206-389	3.504	0.020	
90.00	0.50		206-390	3.543	0.020	
91.00	0.50		206-391	3.583	0.020	
92.00	0.50		206-392	3.622	0.020	
93.00	0.50		206-393	3.661	0.020	
94.00	0.50		206-394	3.701	0.020	
95.00	0.50		206-395	3.740	0.020	
96.00	0.50		206-396	3.780	0.020	
97.00	0.50		206-397	3.819	0.020	
98.00	0.50		206-398	3.858	0.020	
99.00	0.50		206-399	3.898	0.020	
100.00	0.50		206-400	3.937	0.020	
101.00	0.50		206-401	3.976	0.020	
102.00	0.50		206-402	4.016	0.020	
103.00	0.50		206-403	4.055	0.020	
104.00	0.50		206-404	4.094	0.020	
105.00	0.50		206-405	4.134	0.020	
106.00	0.50		206-406	4.173	0.020	
107.00	0.50		206-407	4.213	0.020	
108.00	0.50		206-408	4.252	0.020	
109.00	0.50		206-409	4.291	0.020	
110.00	0.50		206-410	4.331	0.020	
111.00	0.50		206-411	4.370	0.020	
112.00	0.50		206-412	4.409	0.020	
113.00	0.50		206-413	4.449	0.020	
114.00	0.50		206-414	4.488	0.020	
115.00	0.50		206-415	4.528	0.020	
116.00	0.50		206-416	4.567	0.020	
117.00	0.50		206-417	4.606	0.020	
118.00	0.50		206-418	4.646	0.020	
119.00	0.50		206-419	4.685	0.020	
120.00	0.50		206-420	4.724	0.020	
121.00	0.50		206-421	4.764	0.024	
122.00	0.50		206-422	4.803	0.024	
123.00	0.50		206-423	4.843	0.024	
124.00	0.50		206-424	4.882	0.024	
125.00	0.50		206-425	4.921	0.024	
126.00	0.50		206-426	4.961	0.024	
127.00	0.50		206-427	5.000	0.024	
128.00	0.50		206-428	5.039	0.024	
129.00	0.50	206-429	5.079	0.024		
130.00	0.60	206-430	5.118	0.024		
131.00	0.60	206-431	5.157	0.024		
132.00	0.60	206-432	5.197	0.024		
133.00	0.60	206-433	5.236	0.024		
134.00	0.60	206-434	5.276	0.024		
135.00	0.60	206-435	5.315	0.024		
136.00	0.60	206-436	5.354	0.024		
137.00	0.60	206-437	5.394	0.024		
138.00	0.60	206-438	5.433	0.024		
139.00	0.60	206-439	5.472	0.024		
140.00	0.60	206-440	5.512	0.024		
141.00	0.60	206-441	5.551	0.024		
142.00	0.60	206-442	5.591	0.024		
143.00	0.60	206-443	5.630	0.024		
144.00	0.60	206-444	5.669	0.024		
145.00	0.60	206-445	5.709	0.024		
146.00	0.60	206-446	5.748	0.024		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
147.00	0.60	3.00 +/- 0.10	206-447	5.787	0.024	0.118 +/- 0.004
148.00	0.60		206-448	5.827	0.024	
149.00	0.60		206-449	5.866	0.024	
150.00	0.60		206-450	5.906	0.024	
151.00	0.60		206-451	5.945	0.024	
152.00	0.60		206-452	5.984	0.024	
153.00	0.60		206-453	6.024	0.024	
154.00	0.60		206-454	6.063	0.024	
155.00	0.60		206-455	6.102	0.024	
156.00	0.60		206-456	6.142	0.024	
157.00	0.60		206-457	6.181	0.024	
158.00	0.60		206-458	6.220	0.024	
159.00	0.60		206-459	6.260	0.024	
160.00	0.60		206-460	6.299	0.024	
161.00	0.60		206-461	6.339	0.024	
162.00	0.60		206-462	6.378	0.024	
163.00	0.60		206-463	6.417	0.024	
164.00	0.60		206-464	6.457	0.024	
165.00	0.60		206-465	6.496	0.024	
166.00	0.60		206-466	6.535	0.024	
167.00	0.60		206-467	6.575	0.024	
168.00	0.60		206-468	6.614	0.024	
169.00	0.60		206-469	6.654	0.024	
170.00	0.60		206-470	6.693	0.024	
171.00	0.60		206-471	6.732	0.024	
172.00	0.60		206-472	6.772	0.024	
173.00	0.60		206-473	6.811	0.024	
174.00	0.60		206-474	6.850	0.024	
175.00	0.60		206-475	6.890	0.024	
176.00	0.60		206-476	6.929	0.024	
177.00	0.60		206-477	6.969	0.024	
178.00	0.60		206-478	7.008	0.024	
179.00	0.60		206-479	7.047	0.024	
180.00	0.60		206-480	7.087	0.024	
181.00	0.60		206-481	7.126	0.031	
182.00	0.80		206-482	7.165	0.031	
183.00	0.80		206-483	7.205	0.031	
184.00	0.80		206-484	7.244	0.031	
185.00	0.80		206-485	7.283	0.031	
186.00	0.80		206-486	7.323	0.031	
187.00	0.80		206-487	7.362	0.031	
188.00	0.80		206-488	7.402	0.031	
189.00	0.80		206-489	7.441	0.031	
190.00	0.80		206-490	7.480	0.031	
191.00	0.80		206-491	7.520	0.031	
192.00	0.80		206-492	7.559	0.031	
193.00	0.80		206-493	7.598	0.031	
194.00	0.80		206-494	7.638	0.031	
195.00	0.80		206-495	7.677	0.031	
196.00	0.80		206-496	7.717	0.031	
197.00	0.80		206-497	7.756	0.031	
198.00	0.80	206-498	7.795	0.031		
199.00	0.80	206-499	7.835	0.031		
200.00	0.80	206-500	7.874	0.031		
201.00	0.80	206-501	7.913	0.031		
202.00	0.80	206-502	7.953	0.031		
203.00	0.80	206-503	7.992	0.031		
204.00	0.80	206-504	8.031	0.031		
205.00	0.80	206-505	8.071	0.031		
206.00	0.80	206-506	8.110	0.031		
207.00	0.80	206-507	8.150	0.031		
208.00	0.80	206-508	8.189	0.031		
209.00	0.80	206-509	8.228	0.031		
210.00	0.80	206-510	8.268	0.031		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
211.00	0.80	3.00 +/- 0.10	206-511	8.307	0.031	0.118 +/- 0.004
212.00	0.80		206-512	8.346	0.031	
213.00	0.80		206-513	8.386	0.031	
214.00	0.80		206-514	8.425	0.031	
215.00	0.80		206-515	8.465	0.031	
216.00	0.80		206-516	8.504	0.031	
217.00	0.80		206-517	8.543	0.031	
218.00	0.80		206-518	8.583	0.031	
219.00	0.80		206-519	8.622	0.031	
220.00	0.80		206-520	8.661	0.031	
221.00	0.80		206-521	8.701	0.031	
222.00	0.80		206-522	8.740	0.031	
223.00	0.80		206-523	8.780	0.031	
224.00	0.80		206-524	8.819	0.031	
225.00	0.80		206-525	8.858	0.031	
226.00	0.80		206-526	8.898	0.031	
227.00	0.80		206-527	8.937	0.031	
228.00	0.80		206-528	8.976	0.031	
229.00	0.80		206-529	9.016	0.031	
230.00	0.80		206-530	9.055	0.031	
231.00	0.80		206-531	9.094	0.031	
232.00	0.80		206-532	9.134	0.031	
233.00	0.80		206-533	9.173	0.031	
234.00	0.80		206-534	9.213	0.031	
235.00	0.80		206-535	9.252	0.031	
236.00	0.80	206-536	9.291	0.031		
237.00	0.80	206-537	9.331	0.031		
238.00	0.80	206-538	9.370	0.031		
239.00	0.80	206-539	9.409	0.031		
240.00	0.80	206-540	9.449	0.031		
241.00	0.80	206-541	9.488	0.031		
242.00	0.80	206-542	9.528	0.031		
243.00	0.80	206-543	9.567	0.031		
244.00	0.80	206-544	9.606	0.031		
245.00	0.80	206-545	9.646	0.031		
246.00	0.80	206-546	9.685	0.031		
247.00	0.80	206-547	9.724	0.031		
248.00	0.80	206-548	9.764	0.031		
249.00	0.80	206-549	9.803	0.031		
250.00	0.80	206-550	9.843	0.031		
8.00	0.15	3.50 +/- 0.10	206-558	0.315	0.006	0.138 +/- 0.004
9.00	0.15		206-559	0.354	0.006	
10.00	0.20		206-560	0.394	0.008	
11.00	0.20		206-561	0.433	0.008	
12.00	0.20		206-562	0.472	0.008	
13.00	0.20		206-563	0.512	0.008	
14.00	0.20		206-564	0.551	0.008	
15.00	0.20		206-565	0.591	0.008	
16.00	0.20		206-566	0.630	0.008	
17.00	0.20		206-567	0.669	0.008	
18.00	0.20		206-568	0.709	0.008	
19.00	0.25		206-569	0.748	0.010	
20.00	0.25		206-570	0.787	0.010	
21.00	0.25		206-571	0.827	0.010	
22.00	0.25		206-572	0.866	0.010	
23.00	0.25		206-573	0.906	0.010	
24.00	0.25		206-574	0.945	0.010	
25.00	0.25		206-575	0.984	0.010	
26.00	0.25		206-576	1.024	0.010	
27.00	0.25		206-577	1.063	0.010	
28.00	0.25		206-578	1.102	0.010	
29.00	0.25		206-579	1.142	0.010	
30.00	0.25		206-580	1.181	0.010	
31.00	0.30		206-581	1.220	0.012	




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
32.00	0.30	3.50 +/- 0.10	206-582	1.260	0.012	0.138 +/- 0.004
33.00	0.30		206-583	1.299	0.012	
34.00	0.30		206-584	1.339	0.012	
35.00	0.30		206-585	1.378	0.012	
36.00	0.30		206-586	1.417	0.012	
37.00	0.30		206-587	1.457	0.012	
38.00	0.30		206-588	1.496	0.012	
39.00	0.30		206-589	1.535	0.012	
40.00	0.30		206-590	1.575	0.012	
41.00	0.30		206-591	1.614	0.012	
42.00	0.30		206-592	1.654	0.012	
43.00	0.30		206-593	1.693	0.012	
44.00	0.30		206-594	1.732	0.012	
45.00	0.30		206-595	1.772	0.012	
46.00	0.30		206-596	1.811	0.012	
47.00	0.30		206-597	1.850	0.012	
48.00	0.30		206-598	1.890	0.012	
49.00	0.30		206-599	1.929	0.012	
50.00	0.30		206-600	1.969	0.012	
51.00	0.40		206-601	2.008	0.016	
52.00	0.40		206-602	2.047	0.016	
53.00	0.40		206-603	2.087	0.016	
54.00	0.40		206-604	2.126	0.016	
55.00	0.40		206-605	2.165	0.016	
56.00	0.40		206-606	2.205	0.016	
57.00	0.40		206-607	2.244	0.016	
58.00	0.40		206-608	2.283	0.016	
59.00	0.40		206-609	2.323	0.016	
60.00	0.40		206-610	2.362	0.016	
61.00	0.40		206-611	2.402	0.016	
62.00	0.40		206-612	2.441	0.016	
63.00	0.40		206-613	2.480	0.016	
64.00	0.40		206-614	2.520	0.016	
65.00	0.40		206-615	2.559	0.016	
66.00	0.40		206-616	2.598	0.016	
67.00	0.40		206-617	2.638	0.016	
68.00	0.40		206-618	2.677	0.016	
69.00	0.40		206-619	2.717	0.016	
70.00	0.40		206-620	2.756	0.016	
71.00	0.40		206-621	2.795	0.016	
72.00	0.40		206-622	2.835	0.016	
73.00	0.40		206-623	2.874	0.016	
74.00	0.40		206-624	2.913	0.016	
75.00	0.40		206-625	2.953	0.016	
76.00	0.40		206-626	2.992	0.016	
77.00	0.40		206-627	3.031	0.016	
78.00	0.40		206-628	3.071	0.016	
79.00	0.40		206-629	3.110	0.016	
80.00	0.40		206-630	3.150	0.016	
81.00	0.50		206-631	3.189	0.020	
82.00	0.50		206-632	3.228	0.020	
83.00	0.50		206-633	3.268	0.020	
84.00	0.50		206-634	3.307	0.020	
85.00	0.50		206-635	3.346	0.020	
86.00	0.50		206-636	3.386	0.020	
87.00	0.50		206-637	3.425	0.020	
88.00	0.50		206-638	3.465	0.020	
89.00	0.50		206-639	3.504	0.020	
90.00	0.50		206-640	3.543	0.020	
91.00	0.50		206-641	3.583	0.020	
92.00	0.50	206-642	3.622	0.020		
93.00	0.50	206-643	3.661	0.020		
94.00	0.50	206-644	3.701	0.020		
95.00	0.50	206-645	3.740	0.020		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
96.00	0.50	3.50 +/- 0.10	206-646	3.780	0.020	0.138 +/- 0.004
97.00	0.50		206-647	3.819	0.020	
98.00	0.50		206-648	3.858	0.020	
99.00	0.50		206-649	3.898	0.020	
100.00	0.50		206-650	3.937	0.020	
101.00	0.50		206-651	3.976	0.020	
102.00	0.50		206-652	4.016	0.020	
103.00	0.50		206-653	4.055	0.020	
104.00	0.50		206-654	4.094	0.020	
105.00	0.50		206-655	4.134	0.020	
106.00	0.50		206-656	4.173	0.020	
107.00	0.50		206-657	4.213	0.020	
108.00	0.50		206-658	4.252	0.020	
109.00	0.50		206-659	4.291	0.020	
110.00	0.50		206-660	4.331	0.020	
111.00	0.50		206-661	4.370	0.020	
112.00	0.50		206-662	4.409	0.020	
113.00	0.50		206-663	4.449	0.020	
114.00	0.50		206-664	4.488	0.020	
115.00	0.50		206-665	4.528	0.020	
116.00	0.50		206-666	4.567	0.020	
117.00	0.50		206-667	4.606	0.020	
118.00	0.50		206-668	4.646	0.020	
119.00	0.50		206-669	4.685	0.020	
120.00	0.50		206-670	4.724	0.020	
121.00	0.60		206-671	4.764	0.024	
122.00	0.60		206-672	4.803	0.024	
123.00	0.60		206-673	4.843	0.024	
124.00	0.60		206-674	4.882	0.024	
125.00	0.60		206-675	4.921	0.024	
126.00	0.60		206-676	4.961	0.024	
127.00	0.60		206-677	5.000	0.024	
128.00	0.60		206-678	5.039	0.024	
129.00	0.60		206-679	5.079	0.024	
130.00	0.60		206-680	5.118	0.024	
131.00	0.60		206-681	5.157	0.024	
132.00	0.60		206-682	5.197	0.024	
133.00	0.60		206-683	5.236	0.024	
134.00	0.60		206-684	5.276	0.024	
135.00	0.60		206-685	5.315	0.024	
136.00	0.60		206-686	5.354	0.024	
137.00	0.60		206-687	5.394	0.024	
138.00	0.60		206-688	5.433	0.024	
139.00	0.60		206-689	5.472	0.024	
140.00	0.60		206-690	5.512	0.024	
141.00	0.60		206-691	5.551	0.024	
142.00	0.60		206-692	5.591	0.024	
143.00	0.60		206-693	5.630	0.024	
144.00	0.60		206-694	5.669	0.024	
145.00	0.60		206-695	5.709	0.024	
146.00	0.60		206-696	5.748	0.024	
147.00	0.60		206-697	5.787	0.024	
148.00	0.60		206-698	5.827	0.024	
149.00	0.60		206-699	5.866	0.024	
150.00	0.60		206-700	5.906	0.024	
151.00	0.60		206-701	5.945	0.024	
152.00	0.60		206-702	5.984	0.024	
153.00	0.60		206-703	6.024	0.024	
154.00	0.60		206-704	6.063	0.024	
155.00	0.60		206-705	6.102	0.024	
156.00	0.60		206-706	6.142	0.024	
157.00	0.60		206-707	6.181	0.024	
158.00	0.60		206-708	6.220	0.024	
159.00	0.60		206-709	6.260	0.024	




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
160.00	0.60	3.50 +/- 0.10	206-710	6.299	0.024	0.138 +/- 0.004
161.00	0.60		206-711	6.339	0.024	
162.00	0.60		206-712	6.378	0.024	
163.00	0.60		206-713	6.417	0.024	
164.00	0.60		206-714	6.457	0.024	
165.00	0.60		206-715	6.496	0.024	
166.00	0.60		206-716	6.535	0.024	
167.00	0.60		206-717	6.575	0.024	
168.00	0.60		206-718	6.614	0.024	
169.00	0.60		206-719	6.654	0.024	
170.00	0.60		206-720	6.693	0.024	
171.00	0.60		206-721	6.732	0.024	
172.00	0.60		206-722	6.772	0.024	
173.00	0.60		206-723	6.811	0.024	
174.00	0.60		206-724	6.850	0.024	
175.00	0.60		206-725	6.890	0.024	
176.00	0.60		206-726	6.929	0.024	
177.00	0.60		206-727	6.969	0.024	
178.00	0.60		206-728	7.008	0.024	
179.00	0.60		206-729	7.047	0.024	
180.00	0.60		206-730	7.087	0.024	
181.00	0.80		206-731	7.126	0.031	
182.00	0.80		206-732	7.165	0.031	
183.00	0.80		206-733	7.205	0.031	
184.00	0.80		206-734	7.244	0.031	
185.00	0.80		206-735	7.283	0.031	
186.00	0.80		206-736	7.323	0.031	
187.00	0.80		206-737	7.362	0.031	
188.00	0.80		206-738	7.402	0.031	
189.00	0.80		206-739	7.441	0.031	
190.00	0.80		206-740	7.480	0.031	
191.00	0.80		206-741	7.520	0.031	
192.00	0.80		206-742	7.559	0.031	
193.00	0.80		206-743	7.598	0.031	
194.00	0.80		206-744	7.638	0.031	
195.00	0.80		206-745	7.677	0.031	
196.00	0.80		206-746	7.717	0.031	
197.00	0.80		206-747	7.756	0.031	
198.00	0.80		206-748	7.795	0.031	
199.00	0.80		206-749	7.835	0.031	
200.00	0.80		206-750	7.874	0.031	
201.00	0.80		206-751	7.913	0.031	
202.00	0.80		206-752	7.953	0.031	
203.00	0.80		206-753	7.992	0.031	
204.00	0.80		206-754	8.031	0.031	
205.00	0.80		206-755	8.071	0.031	
206.00	0.80		206-756	8.110	0.031	
207.00	0.80		206-757	8.150	0.031	
208.00	0.80		206-758	8.189	0.031	
209.00	0.80		206-759	8.228	0.031	
210.00	0.80		206-760	8.268	0.031	
211.00	0.80		206-761	8.307	0.031	
212.00	0.80		206-762	8.346	0.031	
213.00	0.80		206-763	8.386	0.031	
214.00	0.80		206-764	8.425	0.031	
215.00	0.80		206-765	8.465	0.031	
216.00	0.80		206-766	8.504	0.031	
217.00	0.80		206-767	8.543	0.031	
218.00	0.80		206-768	8.583	0.031	
219.00	0.80		206-769	8.622	0.031	
220.00	0.80		206-770	8.661	0.031	
221.00	0.80		206-771	8.701	0.031	
222.00	0.80		206-772	8.740	0.031	
223.00	0.80		206-773	8.780	0.031	




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
224.00	0.80	3.50 +/- 0.10	206-774	8.819	0.031	0.138 +/- 0.004
225.00	0.80		206-775	8.858	0.031	
226.00	0.80		206-776	8.898	0.031	
227.00	0.80		206-777	8.937	0.031	
228.00	0.80		206-778	8.976	0.031	
229.00	0.80		206-779	9.016	0.031	
230.00	0.80		206-780	9.055	0.031	
231.00	0.80		206-781	9.094	0.031	
232.00	0.80		206-782	9.134	0.031	
233.00	0.80		206-783	9.173	0.031	
234.00	0.80		206-784	9.213	0.031	
235.00	0.80		206-785	9.252	0.031	
236.00	0.80		206-786	9.291	0.031	
237.00	0.80		206-787	9.331	0.031	
238.00	0.80		206-788	9.370	0.031	
239.00	0.80		206-789	9.409	0.031	
240.00	0.80		206-790	9.449	0.031	
241.00	0.80		206-791	9.488	0.031	
242.00	0.80		206-792	9.528	0.031	
243.00	0.80		206-793	9.567	0.031	
244.00	0.80		206-794	9.606	0.031	
245.00	0.80		206-795	9.646	0.031	
246.00	0.80		206-796	9.685	0.031	
247.00	0.80		206-797	9.724	0.031	
248.00	0.80		206-798	9.764	0.031	
249.00	0.80		206-799	9.803	0.031	
250.00	0.80		206-800	9.843	0.031	
251.00	1.00		206-801	9.882	0.039	
252.00	1.00		206-802	9.921	0.039	
253.00	1.00		206-803	9.961	0.039	
254.00	1.00		206-804	10.000	0.039	
255.00	1.00		206-805	10.039	0.039	
256.00	1.00		206-806	10.079	0.039	
257.00	1.00		206-807	10.118	0.039	
258.00	1.00		206-808	10.157	0.039	
259.00	1.00		206-809	10.197	0.039	
260.00	1.00		206-810	10.236	0.039	
261.00	1.00		206-811	10.276	0.039	
262.00	1.00		206-812	10.315	0.039	
263.00	1.00		206-813	10.354	0.039	
264.00	1.00		206-814	10.394	0.039	
265.00	1.00		206-815	10.433	0.039	
266.00	1.00		206-816	10.472	0.039	
267.00	1.00		206-817	10.512	0.039	
268.00	1.00		206-818	10.551	0.039	
269.00	1.00		206-819	10.591	0.039	
270.00	1.00		206-820	10.630	0.039	
271.00	1.00		206-821	10.669	0.039	
272.00	1.00		206-822	10.709	0.039	
273.00	1.00		206-823	10.748	0.039	
274.00	1.00		206-824	10.787	0.039	
275.00	1.00		206-825	10.827	0.039	
276.00	1.00		206-826	10.866	0.039	
277.00	1.00		206-827	10.906	0.039	
278.00	1.00	206-828	10.945	0.039		
279.00	1.00	206-829	10.984	0.039		
280.00	1.00	206-830	11.024	0.039		
281.00	1.00	206-831	11.063	0.039		
282.00	1.00	206-832	11.102	0.039		
283.00	1.00	206-833	11.142	0.039		
284.00	1.00	206-834	11.181	0.039		
285.00	1.00	206-835	11.220	0.039		
286.00	1.00	206-836	11.260	0.039		
287.00	1.00	206-837	11.299	0.039		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
288.00	1.00	3.50 +/- 0.10	206-838	11.339	0.039	0.138 +/- 0.004
289.00	1.00		206-839	11.378	0.039	
290.00	1.00		206-840	11.417	0.039	
291.00	1.00		206-841	11.457	0.039	
292.00	1.00		206-842	11.496	0.039	
293.00	1.00		206-843	11.535	0.039	
294.00	1.00		206-844	11.575	0.039	
295.00	1.00		206-845	11.614	0.039	
296.00	1.00		206-846	11.654	0.039	
297.00	1.00		206-847	11.693	0.039	
298.00	1.00		206-848	11.732	0.039	
299.00	1.00		206-849	11.772	0.039	
300.00	1.00		206-850	11.811	0.039	
301.00	1.50		206-851	11.850	0.059	
302.00	1.50		206-852	11.890	0.059	
303.00	1.50		206-853	11.929	0.059	
304.00	1.50		206-854	11.969	0.059	
305.00	1.50		206-855	12.008	0.059	
306.00	1.50		206-856	12.047	0.059	
307.00	1.50		206-857	12.087	0.059	
308.00	1.50		206-858	12.126	0.059	
309.00	1.50		206-859	12.165	0.059	
310.00	1.50		206-860	12.205	0.059	
311.00	1.50		206-861	12.244	0.059	
312.00	1.50		206-862	12.283	0.059	
313.00	1.50		206-863	12.323	0.059	
314.00	1.50		206-864	12.362	0.059	
315.00	1.50		206-865	12.402	0.059	
316.00	1.50		206-866	12.441	0.059	
317.00	1.50		206-867	12.480	0.059	
318.00	1.50		206-868	12.520	0.059	
319.00	1.50		206-869	12.559	0.059	
320.00	1.50		206-870	12.598	0.059	
321.00	1.50		206-871	12.638	0.059	
322.00	1.50		206-872	12.677	0.059	
323.00	1.50		206-873	12.717	0.059	
324.00	1.50		206-874	12.756	0.059	
325.00	1.50		206-875	12.795	0.059	
326.00	1.50		206-876	12.835	0.059	
327.00	1.50		206-877	12.874	0.059	
328.00	1.50		206-878	12.913	0.059	
329.00	1.50		206-879	12.953	0.059	
330.00	1.50		206-880	12.992	0.059	
331.00	1.50		206-881	13.031	0.059	
332.00	1.50		206-882	13.071	0.059	
333.00	1.50		206-883	13.110	0.059	
334.00	1.50		206-884	13.150	0.059	
335.00	1.50		206-885	13.189	0.059	
336.00	1.50		206-886	13.228	0.059	
337.00	1.50		206-887	13.268	0.059	
338.00	1.50	206-888	13.307	0.059		
339.00	1.50	206-889	13.346	0.059		
340.00	1.50	206-890	13.386	0.059		
341.00	1.50	206-891	13.425	0.059		
342.00	1.50	206-892	13.465	0.059		
343.00	1.50	206-893	13.504	0.059		
344.00	1.50	206-894	13.543	0.059		
345.00	1.50	206-895	13.583	0.059		
346.00	1.50	206-896	13.622	0.059		
347.00	1.50	206-897	13.661	0.059		
348.00	1.50	206-898	13.701	0.059		
349.00	1.50	206-899	13.740	0.059		
350.00	1.50	206-900	13.780	0.059		
351.00	1.50	206-901	13.819	0.059		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
352.00	1.50	3.50 +/- 0.10	206-902	13.858	0.059	0.138 +/- 0.004
353.00	1.50		206-903	13.898	0.059	
354.00	1.50		206-904	13.937	0.059	
355.00	1.50		206-905	13.976	0.059	
356.00	1.50		206-906	14.016	0.059	
357.00	1.50		206-907	14.055	0.059	
358.00	1.50		206-908	14.094	0.059	
359.00	1.50		206-909	14.134	0.059	
360.00	1.50		206-910	14.173	0.059	
361.00	1.50		206-911	14.213	0.059	
362.00	1.50		206-912	14.252	0.059	
363.00	1.50		206-913	14.291	0.059	
364.00	1.50		206-914	14.331	0.059	
365.00	1.50		206-915	14.370	0.059	
366.00	1.50		206-916	14.409	0.059	
367.00	1.50		206-917	14.449	0.059	
368.00	1.50		206-918	14.488	0.059	
369.00	1.50		206-919	14.528	0.059	
370.00	1.50		206-920	14.567	0.059	
371.00	1.50		206-921	14.606	0.059	
372.00	1.50		206-922	14.646	0.059	
373.00	1.50		206-923	14.685	0.059	
374.00	1.50		206-924	14.724	0.059	
375.00	1.50		206-925	14.764	0.059	
376.00	1.50		206-926	14.803	0.059	
377.00	1.50		206-927	14.843	0.059	
378.00	1.50		206-928	14.882	0.059	
379.00	1.50		206-929	14.921	0.059	
380.00	1.50		206-930	14.961	0.059	
381.00	1.50		206-931	15.000	0.059	
382.00	1.50		206-932	15.039	0.059	
383.00	1.50		206-933	15.079	0.059	
384.00	1.50		206-934	15.118	0.059	
385.00	1.50		206-935	15.157	0.059	
386.00	1.50		206-936	15.197	0.059	
387.00	1.50		206-937	15.236	0.059	
388.00	1.50		206-938	15.276	0.059	
389.00	1.50		206-939	15.315	0.059	
390.00	1.50		206-940	15.354	0.059	
391.00	1.50		206-941	15.394	0.059	
392.00	1.50		206-942	15.433	0.059	
393.00	1.50	206-943	15.472	0.059		
394.00	1.50	206-944	15.512	0.059		
395.00	1.50	206-945	15.551	0.059		
396.00	1.50	206-946	15.591	0.059		
397.00	1.50	206-947	15.630	0.059		
398.00	1.50	206-948	15.669	0.059		
399.00	1.50	206-949	15.709	0.059		
400.00	1.50	206-950	15.748	0.059		
401.00	2.00	206-951	15.787	0.079		
402.00	2.00	206-952	15.827	0.079		
403.00	2.00	206-953	15.866	0.079		
404.00	2.00	206-954	15.906	0.079		
405.00	2.00	206-955	15.945	0.079		
406.00	2.00	206-956	15.984	0.079		
407.00	2.00	206-957	16.024	0.079		
408.00	2.00	206-958	16.063	0.079		
409.00	2.00	206-959	16.102	0.079		
410.00	2.00	206-960	16.142	0.079		
411.00	2.00	206-961	16.181	0.079		
412.00	2.00	206-962	16.220	0.079		
413.00	2.00	206-963	16.260	0.079		
414.00	2.00	206-964	16.299	0.079		
415.00	2.00	206-965	16.339	0.079		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
416.00	2.00	3.50 +/- 0.10	206-966	16.378	0.079	0.138 +/- 0.004
417.00	2.00		206-967	16.417	0.079	
418.00	2.00		206-968	16.457	0.079	
419.00	2.00		206-969	16.496	0.079	
420.00	2.00		206-970	16.535	0.079	
421.00	2.00		206-971	16.575	0.079	
422.00	2.00		206-972	16.614	0.079	
423.00	2.00		206-973	16.654	0.079	
424.00	2.00		206-974	16.693	0.079	
425.00	2.00		206-975	16.732	0.079	
426.00	2.00		206-976	16.772	0.079	
427.00	2.00		206-977	16.811	0.079	
428.00	2.00		206-978	16.850	0.079	
429.00	2.00		206-979	16.890	0.079	
430.00	2.00		206-980	16.929	0.079	
431.00	2.00		206-981	16.969	0.079	
432.00	2.00		206-982	17.008	0.079	
433.00	2.00		206-983	17.047	0.079	
434.00	2.00		206-984	17.087	0.079	
435.00	2.00		206-985	17.126	0.079	
436.00	2.00		206-986	17.165	0.079	
437.00	2.00		206-987	17.205	0.079	
438.00	2.00		206-988	17.244	0.079	
439.00	2.00		206-989	17.283	0.079	
440.00	2.00	206-990	17.323	0.079		
1.80	0.13	1.80 +/- 0.08	208-501	0.071	0.005	0.071 +/- 0.003
2.00	0.13		208-502	0.079	0.005	
2.24	0.13		208-503	0.088	0.005	
2.50	0.13		208-504	0.098	0.005	
2.80	0.13		208-505	0.110	0.005	
3.15	0.13		208-506	0.124	0.005	
3.55	0.13		208-507	0.140	0.005	
3.75	0.13		208-508	0.140	0.005	
4.00	0.13		208-509	0.157	0.005	
4.50	0.13		208-510	0.177	0.005	
4.87	0.13		208-511	0.192	0.005	
5.00	0.13		208-512	0.197	0.005	
5.15	0.13		208-513	0.205	0.005	
5.30	0.13		208-514	0.209	0.005	
5.60	0.13		208-515	0.220	0.005	
6.00	0.13		208-516	0.236	0.005	
6.30	0.13		208-517	0.248	0.005	
6.70	0.13		208-518	0.264	0.005	
6.90	0.14		208-519	0.272	0.006	
7.10	0.14		208-520	0.280	0.006	
7.50	0.14		208-521	0.295	0.006	
8.00	0.14		208-522	0.315	0.006	
8.50	0.15		208-523	0.335	0.006	
8.75	0.15		208-524	0.344	0.006	
9.00	0.15		208-525	0.354	0.006	
9.50	0.15		208-526	0.374	0.006	
10.00	0.15		208-527	0.394	0.006	
10.60	0.16		208-528	0.441	0.006	
11.20	0.16		208-529	0.471	0.006	
11.80	0.17		208-530	0.465	0.007	
12.50	0.17		208-531	0.492	0.007	
13.20	0.17		208-532	0.520	0.007	
14.00	0.18	208-533	0.551	0.007		
15.00	0.18	208-534	0.591	0.007		
16.00	0.19	208-535	0.630	0.007		
17.00	0.20	208-536	0.669	0.008		
18.00	0.20	208-537	0.709	0.008		
19.00	0.21	208-538	0.748	0.008		
20.00	0.21	208-539	0.787	0.008		




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
21.20	0.22	1.80 +/- 0.08	208-540	0.835	0.009	0.071 +/- 0.003
22.40	0.23		208-541	0.882	0.009	
23.60	0.24		208-542	0.929	0.009	
25.00	0.24		208-543	0.984	0.009	
25.80	0.25		208-544	1.016	0.010	
26.50	0.25		208-545	1.043	0.010	
28.00	0.26		208-546	1.102	0.010	
30.00	0.26		208-547	1.181	0.010	
31.50	0.28		208-548	1.240	0.011	
32.50	0.29		208-549	1.280	0.011	
33.50	0.29		208-550	1.319	0.011	
34.50	0.30		208-551	1.358	0.012	
35.50	0.31		208-552	1.398	0.012	
36.50	0.31		208-553	1.437	0.012	
37.50	0.32		208-554	1.476	0.013	
38.70	0.32		208-555	1.524	0.013	
40.00	0.33		208-556	1.575	0.013	
41.20	0.34		208-557	1.622	0.013	
42.50	0.35		208-558	1.673	0.014	
43.70	0.35		208-559	1.720	0.014	
45.00	0.36		208-560	1.772	0.014	
47.50	0.38		208-561	1.870	0.015	
50.00	0.39		208-562	1.969	0.015	
53.00	0.41		208-563	2.087	0.016	
56.00	0.42		208-564	2.205	0.017	
60.00	0.45		208-565	2.362	0.018	
63.00	0.46		208-566	2.480	0.018	
67.00	0.49		208-567	2.638	0.019	
71.00	0.51		208-568	2.795	0.020	
75.00	0.53		208-569	2.953	0.021	
80.00	0.56		208-570	3.150	0.022	
85.00	0.59		208-571	3.460	0.023	
90.00	0.62	208-572	3.543	0.024		
95.00	0.64	208-573	3.740	0.025		
100.00	0.67	208-574	3.937	0.026		
106.00	0.71	208-575	4.173	0.028		
112.00	0.74	208-576	4.409	0.029		
118.00	0.77	208-577	4.646	0.030		
125.00	0.81	208-578	4.921	0.032		
4.50	0.13	2.65 +/- 0.09	208-601	0.177	0.005	0.104 +/- 0.004
5.30	0.13		208-602	0.209	0.005	
6.00	0.13		208-603	0.236	0.005	
6.90	0.14		208-604	0.272	0.006	
8.00	0.14		208-605	0.315	0.006	
9.00	0.15		208-606	0.354	0.006	
9.50	0.15		208-607	0.374	0.006	
10.00	0.15		208-608	0.394	0.006	
10.60	0.16		208-609	0.417	0.006	
11.20	0.16		208-610	0.441	0.006	
11.80	0.17		208-611	0.465	0.007	
12.50	0.17		208-612	0.492	0.007	
13.20	0.17		208-613	0.520	0.007	
14.00	0.18		208-614	0.551	0.007	
15.00	0.18		208-615	0.591	0.007	
16.00	0.19		208-616	0.630	0.007	
17.00	0.20		208-617	0.669	0.008	
18.00	0.20		208-618	0.709	0.008	
19.00	0.21		208-619	0.748	0.008	
20.00	0.21		208-620	0.787	0.008	
21.20	0.22		208-621	0.835	0.009	
22.40	0.23		208-622	0.882	0.009	
23.60	0.24		208-623	0.929	0.009	
25.00	0.24		208-624	0.984	0.009	
25.80	0.25		208-625	1.016	0.010	




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
26.50	0.25	2.65 +/- 0.09	208-626	1.043	0.010	0.104 +/- 0.004
28.00	0.26		208-627	1.102	0.010	
30.00	0.27		208-628	1.181	0.011	
31.50	0.28		208-629	1.240	0.011	
32.50	0.29		208-630	1.280	0.011	
33.50	0.29		208-631	1.319	0.011	
34.50	0.30		208-632	1.358	0.012	
35.50	0.31		208-633	1.398	0.012	
36.50	0.31		208-634	1.437	0.012	
37.50	0.32		208-635	1.476	0.013	
38.70	0.32		208-636	1.524	0.013	
40.00	0.33		208-637	1.575	0.013	
41.20	0.34		208-638	1.622	0.013	
42.50	0.35		208-639	1.673	0.014	
43.70	0.35		208-640	1.720	0.014	
45.00	0.36		208-641	1.772	0.014	
46.20	0.37		208-642	1.819	0.015	
47.50	0.38		208-643	1.870	0.015	
48.70	0.38		208-644	1.917	0.015	
50.00	0.39		208-645	1.969	0.015	
51.50	0.40		208-646	2.028	0.016	
53.00	0.41		208-647	2.087	0.016	
54.50	0.42		208-648	2.146	0.017	
56.00	0.42		208-649	2.205	0.017	
58.00	0.44		208-650	2.283	0.017	
60.00	0.45		208-651	2.362	0.018	
61.50	0.45		208-652	2.421	0.018	
63.00	0.46		208-653	2.480	0.018	
65.00	0.48		208-654	2.559	0.019	
67.00	0.49		208-655	2.638	0.019	
69.00	0.50		208-656	2.717	0.020	
71.00	0.51		208-657	2.795	0.020	
73.00	0.52		208-658	2.874	0.020	
75.00	0.53		208-659	2.953	0.021	
80.00	0.56	208-660	3.150	0.022		
85.00	0.59	208-661	3.346	0.023		
90.00	0.62	208-662	3.543	0.024		
95.00	0.64	208-663	3.740	0.025		
100.00	0.67	208-664	3.937	0.026		
106.00	0.71	208-665	4.173	0.028		
112.00	0.74	208-666	4.409	0.029		
118.00	0.77	208-667	4.646	0.030		
125.00	0.81	208-668	4.921	0.032		
132.00	0.85	208-669	5.197	0.033		
140.00	0.89	208-670	5.512	0.035		
150.00	0.95	208-671	5.906	0.037		
160.00	1.00	208-672	6.299	0.039		
170.00	1.06	208-673	6.930	0.042		
180.00	1.11	208-674	7.087	0.044		
190.00	1.17	208-675	7.480	0.046		
200.00	1.22	208-676	7.874	0.048		
212.00	1.29	208-677	8.346	0.051		
224.00	1.35	208-678	8.819	0.053		
236.00	1.42	208-679	9.291	0.056		
250.00	1.49	208-680	9.843	0.059		
14.00	0.18	3.55 +/- 0.10	208-701	0.551	0.007	0.14 +/- 0.004
15.00	0.18		208-702	0.591	0.007	
16.00	0.19		208-703	0.630	0.007	
17.00	0.20		208-704	0.669	0.008	
18.00	0.20		208-705	0.709	0.008	
19.00	0.21		208-706	0.748	0.008	
20.00	0.21		208-707	0.787	0.008	
21.20	0.22		208-708	0.835	0.009	
22.40	0.23		208-709	0.882	0.009	




Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
23.60	0.24	3.55 +/- 0.10	208-710	0.929	0.009	0.14 +/- 0.004
25.00	0.24		208-711	0.984	0.009	
25.80	0.25		208-712	1.016	0.010	
26.50	0.25		208-713	1.043	0.010	
28.00	0.26		208-714	1.102	0.010	
30.00	0.27		208-715	1.181	0.011	
31.50	0.28		208-716	1.240	0.011	
32.50	0.29		208-717	1.280	0.011	
33.50	0.29		208-718	1.319	0.011	
34.50	0.30		208-719	1.358	0.012	
35.50	0.31		208-720	1.398	0.012	
36.50	0.31		208-721	1.437	0.012	
37.50	0.32		208-722	1.476	0.012	
38.70	0.32		208-723	1.524	0.013	
40.00	0.33		208-724	1.575	0.013	
41.20	0.34		208-725	1.622	0.013	
42.50	0.35		208-726	1.673	0.014	
43.70	0.35		208-727	1.720	0.014	
45.00	0.36		208-728	1.772	0.014	
46.20	0.37		208-729	1.819	0.015	
47.50	0.38		208-730	1.870	0.015	
48.70	0.38		208-731	1.917	0.015	
50.00	0.39		208-732	1.969	0.015	
51.50	0.40		208-733	2.028	0.016	
53.00	0.41		208-734	2.087	0.016	
54.50	0.42		208-735	2.146	0.017	
56.00	0.42		208-736	2.205	0.017	
58.00	0.44		208-737	2.283	0.017	
60.00	0.45		208-738	2.362	0.018	
61.50	0.45		208-739	2.421	0.018	
63.00	0.46		208-740	2.480	0.018	
65.00	0.48		208-741	2.559	0.019	
67.00	0.49		208-742	2.638	0.019	
69.00	0.50		208-743	2.717	0.020	
71.00	0.51		208-744	2.795	0.020	
73.00	0.52		208-745	2.874	0.020	
75.00	0.53		208-746	2.953	0.021	
77.50	0.55		208-747	3.051	0.022	
80.00	0.56		208-748	3.150	0.022	
82.50	0.57		208-749	3.248	0.022	
85.00	0.59		208-750	3.346	0.023	
87.50	0.60		208-751	3.445	0.024	
90.00	0.62		208-752	3.543	0.024	
92.50	0.63		208-753	3.642	0.025	
95.00	0.64		208-754	3.740	0.025	
97.50	0.66		208-755	3.839	0.026	
100.00	0.67		208-756	3.937	0.026	
103.00	0.69		208-757	4.055	0.027	
106.00	0.71		208-758	4.173	0.028	
109.00	0.72		208-759	4.291	0.028	
112.00	0.74	208-760	4.409	0.029		
115.00	0.76	208-761	4.528	0.030		
118.00	0.77	208-762	4.646	0.030		
122.00	0.80	208-763	4.803	0.031		
125.00	0.81	208-764	4.921	0.032		
128.00	0.83	208-765	5.039	0.033		
132.00	0.85	208-766	5.197	0.033		
136.00	0.87	208-767	5.354	0.034		
140.00	0.89	208-768	5.512	0.035		
145.00	0.92	208-769	5.709	0.036		
150.00	0.95	208-770	5.906	0.037		
155.00	0.98	208-771	6.102	0.039		
160.00	1.00	208-772	6.299	0.039		
165.00	1.03	208-773	6.496	0.041		



Millimetres			Size Ref	Inches				
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)		
170.00	1.06	3.55 +/- 0.10	208-774	6.693	0.042	0.14 +/- 0.004		
175.00	1.09		208-775	6.890	0.043			
180.00	1.11		208-776	7.087	0.044			
185.00	1.14		208-777	7.283	0.045			
190.00	1.17		208-778	7.480	0.046			
195.00	1.20		208-779	7.677	0.047			
200.00	1.22		208-780	7.874	0.048			
212.00	1.29		208-781	8.346	0.051			
224.00	1.35		208-782	8.819	0.053			
236.00	1.42		208-783	9.291	0.056			
250.00	1.49		208-784	9.843	0.059			
265.00	1.57		208-785	10.433	0.062			
280.00	1.65		208-786	11.024	0.065			
300.00	1.76		208-787	11.811	0.069			
315.00	1.84		208-788	12.402	0.072			
335.00	1.95		208-789	13.189	0.077			
355.00	2.06		208-790	13.976	0.081			
37.50	0.32		5.30 +/- 0.13	208-801	1.476		0.012	0.209 +/- 0.005
38.70	0.32			208-802	1.524		0.013	
40.00	0.33			208-803	1.575		0.013	
41.20	0.34	208-804		1.622	0.013			
42.50	0.35	208-805		1.673	0.014			
43.70	0.35	208-806		1.720	0.014			
45.00	0.36	208-807		1.772	0.014			
46.20	0.37	208-808		1.819	0.015			
47.50	0.38	208-809		1.870	0.015			
48.70	0.38	208-810		1.917	0.015			
50.00	0.39	208-811		1.969	0.015			
51.50	0.40	208-812		2.028	0.016			
53.00	0.41	208-813		2.087	0.016			
54.50	0.42	208-814		2.146	0.017			
56.00	0.42	208-815		2.205	0.017			
58.00	0.44	208-816		2.283	0.017			
60.00	0.45	208-817		2.362	0.018			
61.50	0.45	208-818		2.421	0.018			
63.00	0.46	208-819		2.480	0.018			
65.00	0.48	208-820		2.559	0.019			
67.00	0.49	208-821		2.638	0.019			
69.00	0.50	208-822		2.717	0.020			
71.00	0.51	208-823		2.795	0.020			
73.00	0.52	208-824		2.874	0.020			
75.00	0.53	208-825		2.953	0.021			
77.50	0.55	208-826		3.051	0.022			
80.00	0.56	208-827		3.150	0.022			
82.50	0.57	208-828		3.248	0.022			
85.00	0.59	208-829		3.346	0.023			
87.50	0.60	208-830		3.445	0.024			
90.00	0.62	208-831		3.543	0.024			
92.50	0.63	208-832		3.642	0.025			
95.00	0.64	208-833		3.740	0.025			
97.50	0.66	208-834		3.839	0.026			
100.00	0.67	208-835		3.937	0.026			
103.00	0.69	208-836		4.055	0.027			
106.00	0.71	208-837		4.173	0.028			
109.00	0.72	208-838		4.291	0.028			
112.00	0.74	208-839		4.409	0.029			
115.00	0.76	208-840		4.528	0.030			
118.00	0.77	208-841	4.646	0.030				
122.00	0.80	208-842	4.803	0.031				
125.00	0.81	208-843	4.921	0.032				
128.00	0.83	208-844	5.039	0.033				
132.00	0.85	208-845	5.197	0.033				
136.00	0.87	208-846	5.354	0.034				
140.00	0.89	208-847	5.512	0.035				



Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
145.00	0.92	5.30 +/- 0.13	208-848	5.709	0.036	0.209 +/- 0.005
150.00	0.95		208-849	5.906	0.037	
155.00	0.98		208-850	6.102	0.039	
160.00	1.00		208-851	6.299	0.039	
165.00	1.03		208-852	6.496	0.041	
170.00	1.06		208-853	6.693	0.042	
175.00	1.09		208-854	6.890	0.043	
180.00	1.11		208-855	7.087	0.044	
185.00	1.14		208-856	7.283	0.045	
190.00	1.17		208-857	7.480	0.046	
195.00	1.20		208-858	7.677	0.047	
200.00	1.22		208-859	7.874	0.048	
206.00	1.59		208-860	8.110	0.063	
212.00	1.63		208-861	8.346	0.064	
218.00	1.67		208-862	8.583	0.066	
224.00	1.71		208-863	8.819	0.067	
230.00	1.75		208-864	9.055	0.069	
236.00	1.79		208-865	9.291	0.070	
243.00	1.83		208-866	9.567	0.072	
250.00	1.88		208-867	9.843	0.074	
258.00	1.93		208-868	10.157	0.076	
265.00	1.98		208-869	10.433	0.078	
272.00	2.02		208-870	10.709	0.080	
280.00	2.08		208-871	11.024	0.082	
290.00	2.14		208-872	11.417	0.084	
300.00	2.21		208-873	11.811	0.087	
307.00	2.25		208-874	12.087	0.089	
315.00	2.30		208-875	12.402	0.091	
325.00	2.37		208-876	12.795	0.093	
335.00	2.43		208-877	13.189	0.096	
345.00	2.49		208-878	13.583	0.098	
355.00	2.56		208-879	13.976	0.101	
365.00	2.62		208-880	14.370	0.103	
375.00	2.68	208-881	14.764	0.106		
387.00	2.76	208-882	15.236	0.109		
400.00	2.84	208-883	15.748	0.112		
109.00	0.72	7.00 +/- 0.15	208-901	4.291	0.028	0.276 +/- 0.006
112.00	0.74		208-902	4.409	0.029	
115.00	0.76		208-903	4.528	0.030	
118.00	0.77		208-904	4.646	0.030	
122.00	0.80		208-905	4.803	0.031	
125.00	0.81		208-906	4.921	0.032	
128.00	0.83		208-907	5.039	0.033	
132.00	0.85		208-908	5.197	0.033	
136.00	0.87		208-909	5.354	0.034	
140.00	0.89		208-910	5.512	0.035	
145.00	0.92		208-911	5.709	0.036	
150.00	0.95		208-912	5.906	0.037	
155.00	0.98		208-913	6.102	0.039	
160.00	1.00		208-914	6.299	0.039	
165.00	1.03		208-915	6.496	0.041	
170.00	1.06		208-916	6.693	0.042	
175.00	1.09		208-917	6.890	0.043	
180.00	1.11		208-918	7.087	0.044	
185.00	1.14		208-919	7.283	0.045	
190.00	1.17		208-920	7.480	0.046	
195.00	1.20		208-921	7.677	0.047	
200.00	1.22		208-922	7.874	0.048	
206.00	1.26		208-923	8.110	0.050	
212.00	1.29		208-924	8.346	0.051	
218.00	1.32	208-925	8.523	0.052		
224.00	1.35	208-926	8.819	0.053		
230.00	1.39	208-927	9.055	0.055		
236.00	1.42	208-928	9.291	0.056		



Millimetres			Size Ref	Inches		
Inner Diameter (mm)	Inner Diameter Tolerance +/-	Cross Section (mm)		Inner Diameter (inch)	Inner Diameter Tolerance +/-	Cross Section (inch)
243.00	1.46	7.00 +/- 0.15	208-929	9.567	0.057	0.276 +/- 0.006
250.00	1.49		208-930	9.843	0.059	
258.00	1.54		208-931	10.157	0.061	
265.00	1.57		208-932	10.433	0.062	
272.00	1.61		208-933	10.709	0.063	
280.00	1.65		208-934	11.024	0.065	
290.00	1.71		208-935	11.417	0.067	
300.00	1.76		208-936	11.811	0.069	
307.00	1.80		208-937	12.087	0.071	
315.00	1.84		208-938	12.402	0.072	
325.00	1.90		208-939	12.795	0.075	
335.00	1.95		208-940	13.189	0.077	
345.00	2.00		208-941	13.583	0.079	
355.00	2.06		208-942	13.976	0.081	
365.00	2.11		208-943	14.370	0.083	
375.00	2.16		208-944	14.764	0.085	
387.00	2.23		208-945	15.236	0.088	
400.00	2.29		208-946	15.748	0.090	
412.00	2.91		208-947	16.220	0.115	
425.00	2.99		208-948	16.732	0.118	
437.00	3.07		208-949	17.205	0.121	
450.00	3.15		208-950	17.717	0.124	
462.00	3.22		208-951	18.189	0.127	
475.00	3.30		208-952	18.701	0.130	
487.00	3.37		208-953	19.173	0.133	
500.00	3.45		208-954	19.685	0.136	
515.00	3.54		208-955	20.276	0.139	
530.00	3.63		208-956	20.866	0.143	
545.00	3.06		208-957	21.457	0.120	
560.00	3.13		208-958	22.047	0.123	
580.00	3.24		208-959	22.835	0.128	
600.00	3.34		208-960	23.622	0.131	
615.00	3.42		208-961	24.213	0.135	
630.00	3.50		208-962	24.803	0.138	
650.00	3.60	208-963	25.591	0.142		
670.00	3.71	208-964	26.378	0.146		


The Dowty O-ring dimensions provided were taken from the following sections of the Dowty O-ring Catalogue:-

- Section 2: International inch range of O-rings (200/100 series)
- Section 3: British metric range of O-rings (202/102 series)
- Section 4: European metric range of O-rings (201, 204 and 206 series)
- Section 5: International metric range of O-rings (208/108 series)

The 200+ series denotes O-rings for industrial only, O-rings for Aerospace use are denoted by 100, 102 and 108 series numbers.

Dowty Part Numbers

Dowty O-rings are assigned a 10 digit part/reference number.

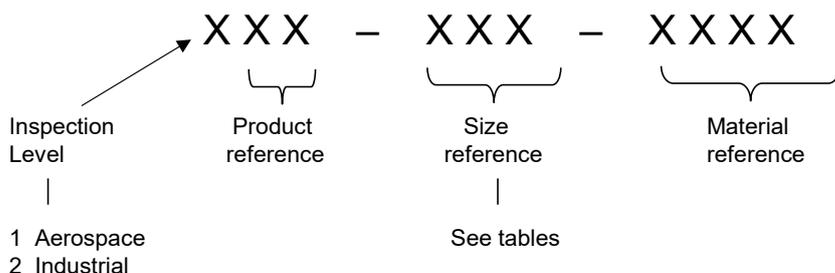

PPE does not accept responsibility for the accuracy of the data provided in this document.