



# ENDURA<sup>®</sup> V91A


## Oilfield Elastomer



An FKM with exceptional rapid gas decompression resistance and outstanding low temperature performance. This material has excellent chemical resistance to sour gas (H<sub>2</sub>S), crude oil, lubricating agents, and oil additives.

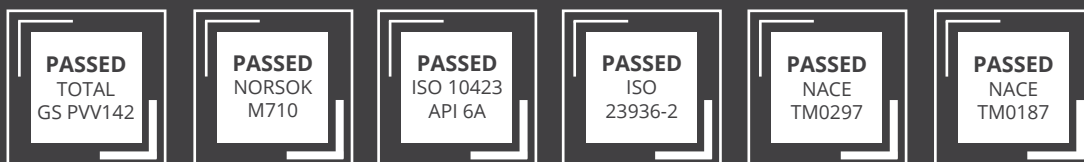

### Operating Range

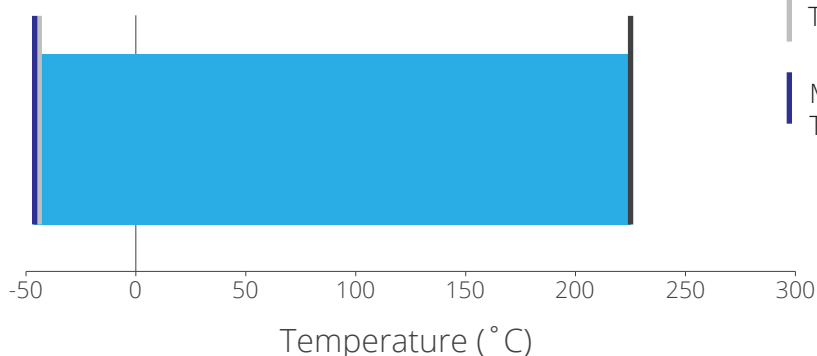


Maximum Temperature

T<sub>g</sub> [ASTM D7426]

Minimum Temperature  
TR10 [ASTM D1329]



# ENDURA® V91A

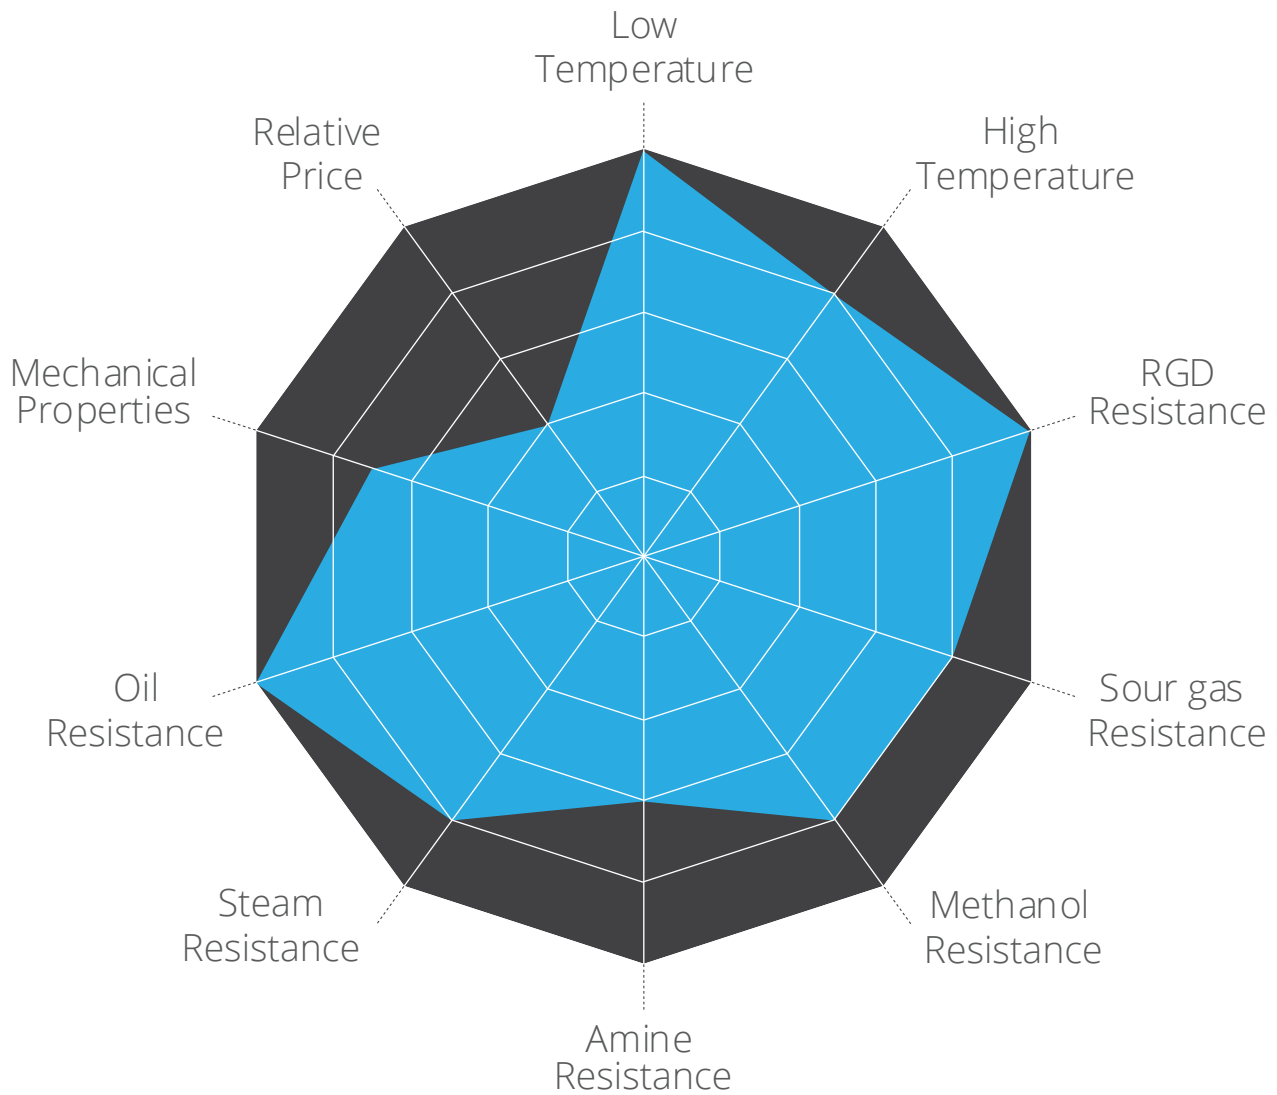

*\*This diagram is a visual representation of EnDura V91A material performance characteristics.*



## RGD Performance

Evidenced by Norsok Annex B Testing, TOTAL GS EP PW 142.



## Chemical Resistance

Evidenced by Norsok Annex A, API 6A, NACE TM0187.



Precision Polymer Engineering

For more information visit

[www.prepol.com](http://www.prepol.com)

2126A